

Part number:

**HYDROMA**

HYDRAULICKÉ SYSTÉMY

**HIDROMA**  
SISTEMS

UKŁADY HYDRAULICZNE


**HYDROMA**

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

Blue rectangles are links to other catalog pages.

## ELECTRO-PROPORTIONAL VALVES—FLOW CONTROLS

### PV70-30 Proportional Flow Control Cartridge,

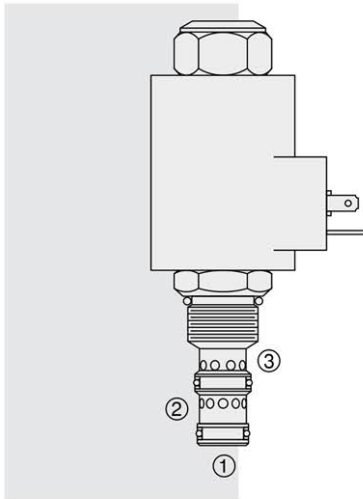

#### DESCRIPTION

A solenoid-operated, electrically-variable, three-port, pressure-compensated, spool-type, normally closed when de-energized, proportional flow control valve. It can be used as a priority-type flow regulator with pressure-compensated, regulated and bypass flow. It can also be used as a restrictive-type 2-way, pressure-compensated flow regulator when the bypass line (port 2) is blocked.

#### OPERATION

The PV70-30 will regulate flow out of port 3 regardless of system working pressure. With an increasing current applied to the solenoid, the PV70-30 will increase output flow.

**Note:** When used as a bypass flow control in applications where the priority flow port will be blocked by external valving, bypass pressure drop will increase unless a small amount of leakage is provided for the priority port. Consult factory.

#### Operation of Manual Override:

To Engage: Turn clockwise approximately 1 turn to reach start point. Continue another approximately 5 turns to full shift.

To Disengage: Turn counterclockwise approximately 6 turns to positive stop.

#### FEATURES

- Excellent linearity and hysteresis.
- Hardened spool and cage for long life.
- Optional coil voltages and terminations.
- Efficient wet armature construction.
- Cartridges voltage interchangeable.
- Unitized, molded coil design.
- Coil waterproofing standard.
- Manual override option.

#### RATINGS

**Operating Pressure:** Inlet: 240 bar (3500 psi); Ports 2 and 3: 207 bar (3000 psi)

**Regulated Flow Rate:** Bypass Blocked, Range A: 26 lpm (7 gpm)  
Bypass Blocked, Range B: 17 lpm (4.5 gpm)  
Bypass Open, Range A: 30 lpm (8 gpm)  
Bypass Open, Range B: 17 lpm (4.5 gpm)

**Maximum Input Flow:** Bypass Open, Range A: 50 lpm (13 gpm)  
Bypass Open, Range B: 26 lpm (7 gpm)

**Internal Leakage:** 197 cc/min. (12 cu. in./min.) fully closed at 207 bar (3000 psi)

**Electrical:** 2 standard voltage ratings

Coil Voltage	Threshold Current	Max. Control Current
12 VDC	250 ± 100 mA	1250 ± 150 mA
24 VDC	125 ± 50 mA	600 ± 75 mA

**Filtration:** See page 9.010.1

**Fluids:** Mineral-based or synthetics with lubricating properties at viscosities of 7.4 to 420 cSt (50 to 2000 sus); See Temperature and Oil Viscosity, page 9.060.1

**Installation:** No restrictions; See page 9.020.1.

**Cavity:** VC10-3; See page 9.110.1

**Cavity Tool:** CT10-3X-XX; See page 8.600.1


**Seal Kit:** SK10-3X-MM; See page 8.650.1 for seal kit options and appropriate seals based on application temperature range.

#### Recommended Electronic Controllers:


See page 2.001.1 or our Electronics catalog.

#### SYMBOLS

#### USASI/ISO:



#### PERFORMANCE

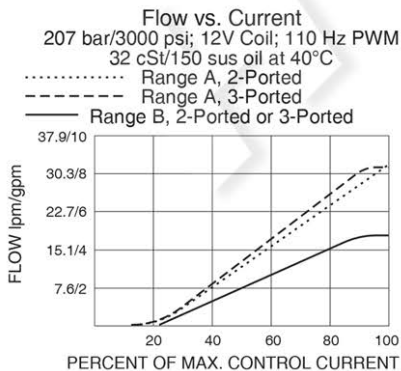


Performance info. continued on following page.

# Normally Closed


# PV70-30

## PERFORMANCE (Continued)


Regulated Flow vs. Pressure Drop  
2-Ported; Flow Range A  
240 bar/3500 psi Inlet  
12V Coil; 110 Hz PWM  
32 cSt/150 sus oil at 40°C

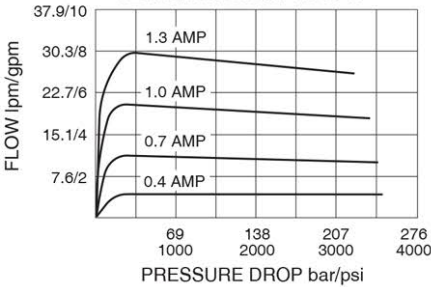

Regulated Flow vs. Pressure Drop  
2-Ported; Flow Range B  
240 bar/3500 psi Inlet  
12V Coil; 110 Hz PWM  
32 cSt/150 sus oil at 40°C

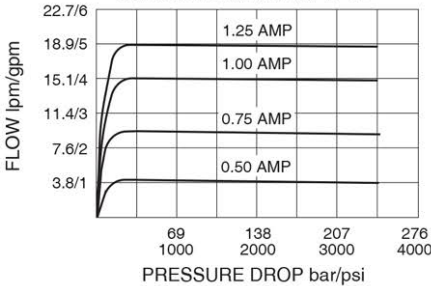

## DIMENSIONS

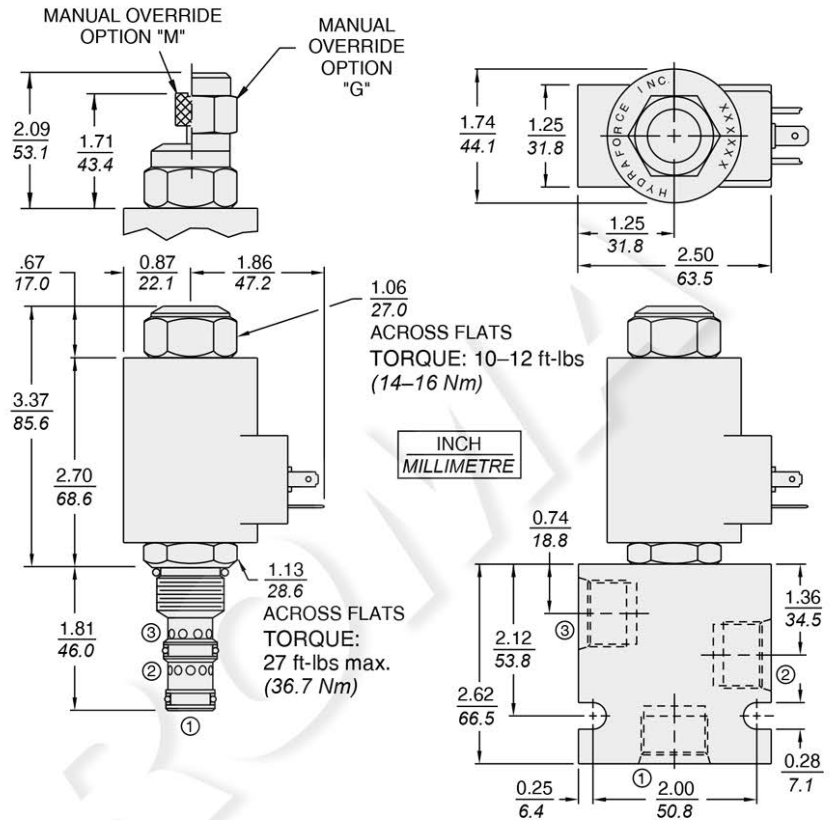

## MATERIALS

**Cartridge:** Weight: 0.19 kg. (0.42 lbs.)  
Steel with hardened work surfaces.  
Zinc-plated exposed surfaces.  
Buna N O-rings and polyester elastomer  
back-ups standard.

**Standard Ported Body:** Weight:  
0.36 kg. (0.80 lbs.) Anodized high-  
strength 6061 T6 aluminum alloy,  
rated to 207 bar (3000 psi). Ductile  
iron bodies available; dimensions  
may differ. See page 8.010.1

**70-Size "D" Coil:** Weight: 0.32 kg.  
(0.7 lbs.) Unitized thermoplastic  
encapsulated, Class H high  
temperature magnet-wire.  
See page 3.200.7.

**70-Size "E" Coil:** Weight: 0.41 kg.  
(0.9 lbs.) Fully encapsulated with  
rugged external metal shell.  
IP69K rated. See page 3.400.13.

## TO ORDER

<b>PV70-30</b>		-	-	-	-	-	-
<b>Flow Range</b> Required. See Performance Curves.	A B	<b>Porting</b> 0 Cartridge Only 6T SAE 6 8T SAE 8 2B 1/4 in. BSP* 3B 3/8 in. BSP*	<b>Terminations D-Coil</b> DS Dual Spades DG DIN 43650 DL Leadwires (2) DL/W Leads w/Weatherpak® Connectors	<b>Terminations E-Coil</b> IP69K Rated ER Deutsch DT04-2P EY Metri-Pack® 150	<b>Seals</b> Buna N (Std.) Fluorocarbon	<b>Coils with internal diode are available. Consult factory.</b>	<b>Voltage</b> 0 Less Coil 12 12 VDC 24 24 VDC
<b>Option(s)</b> None Manual Override Manual Override with Guard	(Blank) M G	*BSP Body; U.K. Mfr. Only			N V		