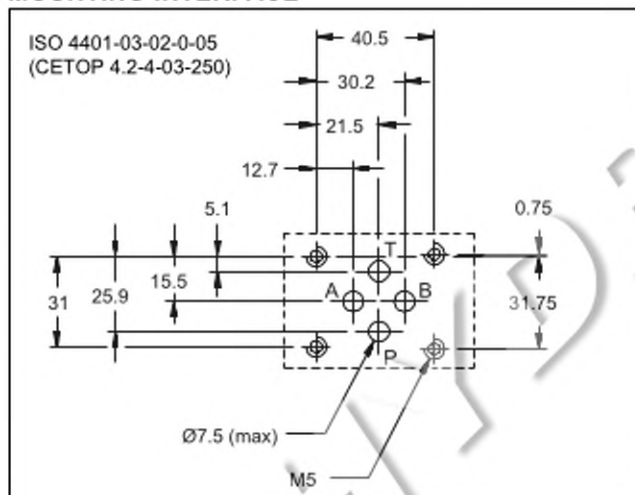
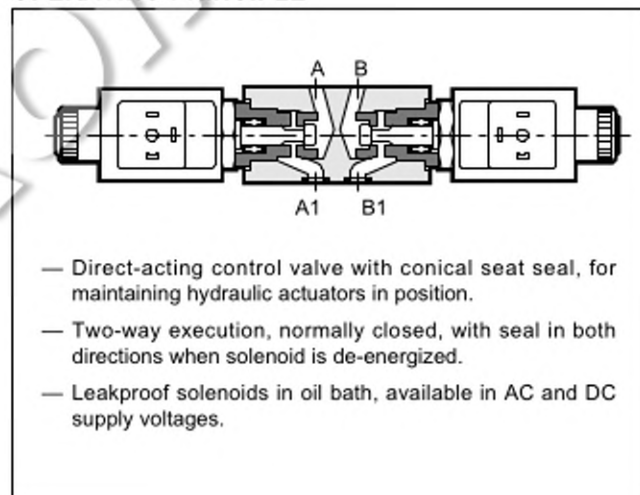


42 250/117 ED

MDT**POPPET TYPE
SOLENOID OPERATED
DIRECTIONAL CONTROL VALVE
SERIES 10****MODULAR VERSION
ISO 4401-03****p** max 250 bar**Q** max 25 l/min**MOUNTING INTERFACE****OPERATING PRINCIPLE****VALVE CONFIGURATIONS** (see hydraulic symbols table)


Configuration "SA": utilized when line A flow is to be controlled.

Configuration "SB": utilized when line B flow is to be controlled.

Configuration "D": utilized when flows of lines A and B are to be controlled

PERFORMANCE RATINGS (working with mineral oil of viscosity of 36 cSt at 50°C)

Maximum operating pressure	bar	250
Maximum flow rate in controlled lines	l/min	25
Maximum flow rate in free lines		65
Ambient temperature range	°C	-20 / +50
Fluid temperature range	°C	-20 / +80
Fluid viscosity range	cSt	10 ÷ 400
Fluid contamination degree	According to ISO 4406:1999 class 20/18/15	
Recommended viscosity	cSt	25
Mass	MDT-D	1,7
	MDT-SA/SB	1,2

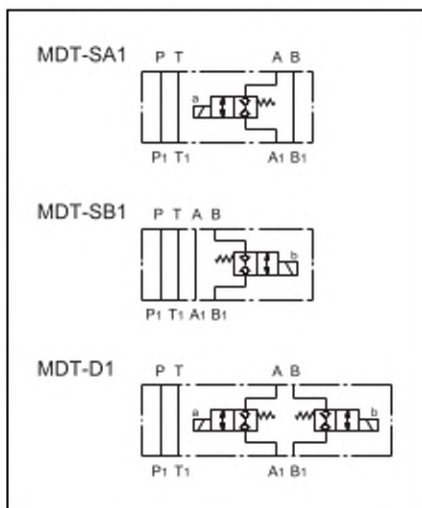HYDRAULIC SYMBOLS

1 - IDENTIFICATION CODE

M	D	T	-		1	/	10	-		/	
----------	----------	----------	----------	--	----------	----------	-----------	----------	--	----------	--

Modular valve ISO 4401-03

Poppet type solenoid operated directional control valve

Configurations: **SA** = control on line A
SB = control on line B
D = control on lines A and B

double seal - normally closed



Seals: omit for mineral oils
V = viton for special fluids

Supply voltages: see par. 3
Direct current: **12V DC**
24V DC
Alternating current: **110 RAC**
220 RAC

Series No.: (the overall and mounting dimensions remain unchanged from 10 to 19)

NOTE: Solenoid valves are delivered without connectors. Connectors type EN 175301-803 (ex DIN 43650) can be ordered separately. See catalogue 49 000.

2 - CHARACTERISTIC CURVES (values obtained with viscosity 36 cSt at 50°C)

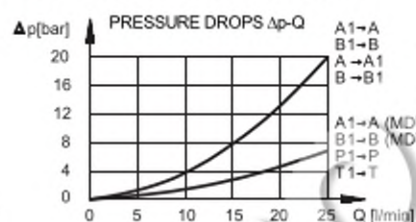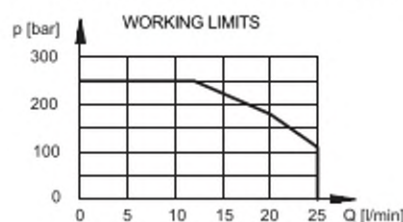

3 - SUPPLY VOLTAGES

A connector with bridge rectifier and RAC coils are always used for alternating current supply.

Times $\pm 10\%$	
Energizing	30 ms
De-energizing	50 ms

4 - HYDRAULIC FLUIDS

Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals. For fluids HFDR type (phosphate esters) use FPM seals (code V). For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department. Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics. The fluid must be preserved in its physical and chemical characteristics.

5 - OVERALL AND MOUNTING DIMENSIONS

