

Part number:

HYDROMA

HYDRAULICKÉ SYSTÉMY

HIDROMA
SYSTEMS

UKŁADY HYDRAULICZNE

HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

D20

SECTIONAL VALVE





Applications

The valve is available with manual, hydraulic remote, pneumatic and electrohydraulic controls.

Working sections have auxiliary valves and a broad range of interchangeable spools.

Special versions for LS variable pumps can be realised on request.

Suitable for applications including Wheel loaders, Truck cranes, Drilling machines, Sea platform cranes, Presses, Compactor, Hook and Skip loaders.



QUICK REFERENCE GUIDE

GENERAL SPECIFICATION	D9	D3M	DVS10	D4	D6	D16	D12	DVS20	D20	D25	D40
Working sections number	1-12	1-12	1-12	1-12	1-12	1-12	1-12	1-12	1-12	1-12	1-10
CIRCUIT											
Parallel	•	•	•	•	•	•	•	•	•	•	•
Series	•	•	•	•	•	•	•		•	•	
Tandem	•	•	•	•	•	•		•	•		
Parallel circuit stroke (mm)	6	5	6	6	7	7	9,5	9,5	9,5	12	15
Series circuit stroke (mm)	6	5	6	6	5	7	6,5		6,5	8,5	
Float spool extra stroke (mm)	5	5	5	5,5	6	7	7	7	7	9,5	10
Spools pitch (mm)	31	38	35	40	46	46	56	56	64	75	91
RATED FLOW											
Max recommended flow rate (l/min)	35	55	45	80	100	150	180	250	250	380	700
Max recommended flow rate (GPM)	10	15	12	22	27	40	48	67	67	100	185
RATED PRESSURE											
Max working pressure (bar)	350	350	350	350	350	350	350	250	350	350	350
Max working pressure (PSI)	5000	5000	5000	5000	5000	5000	5000	4000	5000	5000	5000

OPTION CHART	D9	D3M	DVS10	D4	D6	D16	D12	DVS20	D20	D25	D40
Direct acting pressure relief valve	•	•	•	•							
Pilot operated pressure relief valve		•		•	•	•	•	•	•	•	•
2 stage pilot operated relief valve		•		•	•	•	•		•	•	•
Externally piloted valve	•	•	•	•	•	•	•		•	•	•
Solenoid dump valve (12 Vdc)	•	•	•	•	•	•	•				
Solenoid dump valve (24 Vdc)	•	•	•	•	•	•	•				
Main anticavitation check valve		•		•	•	•	•	•	•	•	•
Clamping valve		•	•	•							
SPOOL ACTUATION											
Manual control	•	•	•	•	•	•	•	•	•	•	•
Without lever	•	•	•	•	•	•	•	•	•	•	•
90° joystick control		•	•	•	•	•					
Hydraulic control	•	•	•	•	•	•	•	•	•	•	•
Direct electric control (12-24 Vdc)		•		•							
SPOOL RETURN ACTION											
Spring return	•	•	•	•	•	•	•	•	•	•	•
Detent in A - in B - in A/B	•	•	•	•	•	•	•	•	•	•	•
Detent in 4 th position	•	•	•	•	•	•	•	•	•	•	•
Arrangement for dual control	•	•		•	•	•	•		•		
Hydraulic load limit	•	•		•	•	•					
Pneumatic control ON - OFF		•	•	•	•	•	•	•	•		
Proportional pneumatic control		•	•	•	•	•	•	•	•		
Electrical load limit	•	•		•	•	•					
Electrohydraulic control ON-OFF (12-24 Vdc)		•	•	•	•	•	•	•	•		
Electrohydraulic control PROP. (12-24 Vdc)		•	•	•	•	•	•	•	•		
Electropneumatic control (12-24 Vdc)		•	•	•	•	•	•		•		
AUXILIARY VALVES											
Antishock valve	•	•	•	•	•	•	•	•	•	•	•
Anticavitation valve	•	•		•	•	•	•	•	•	•	•
Combined valve	•	•	•		•	•	•		•	•	•
Pilot combined valve						•		•	•	•	•

GENERAL INDEX

4	General specifications Standard working conditions Fluid options
5	Order example Standard thread Thread codes Tie-rod kit classification Painting
7	Dimensions
8	Typical curves Pressure drop (P - T) Pressure drop (P - A/B) Pressure drop (A/B - T) Direct relief valve curve Combined valve curve Antishock valve curve Anticavitation check valve curve
10	Inlet Section Order example Inlet side classification Valve identification Valve arrangement Inlet position and available thread type
14	Working section Order example Spool identification Spool actuation classification for manual control Spool actuation classification for hydraulic control Spool return action classification - Spring load values Work section identification Auxiliary valves identification
25	Intermediate inlet section Order example Intermediate inlet section classification Valve identification on intermediate inlet section Valve arrangement on intermediate inlet section Inlet position and available thread type
29	Intermediate outlet section Order example Intermediate outlet section classification Inlet position and available thread type (for BF intermediate) Inlet position and available thread type (for BG intermediate)
32	Outlet section (version 1 outlet) Order example
32	Outlet section (HPCO version outlet) Order example - HPCO version outlet Outlet with single tank classification Outlet with two tanks classification Carry-over connection (HPCO)
36	D20 Spare parts list Gasket kits
39	Installation
41	General conditions and patents

GENERAL SPECIFICATIONS

Standard working conditions

Description	Value
Ambient operating temperature range	-40°C / +60°C
Kinematic viscosity range	10 ÷ 300 cSt
Max contamination level	9 (NAS 1638) - 20/18/15 (ISO 4406:1999)
Recommended filtration level	b10 > 75 (ISO 16889:2008)
Internal filter (on electroproportional valves pilot line)	30 µm

All information and diagrams in this catalogue refer to a mineral base oil VG46 at 50°C temperature (32 cSt kinematic viscosity)

Fluid options

Types of fluid (according to ISO 6743/4) Oil and Solutions	Temperature (°C)		Compatible gasket
	min	max	
Mineral Oil HL, HM (or HLP acc. to DIN 51524)	-25	+80	NBR
Oil in water emulsions HFA	+5	+55	NBR
Water in oil emulsions HFB	+5	+55	NBR
Polyglycol-based aqueous solution HFC	-10	+60	NBR

For special applications and different fluids, please call our Technical Department.

ORDER EXAMPLE

D20/1: **IR 009 150 A G06** **W001A H005 RP G06 01 PA 100 01 PB 100** **TJ A G07**

TYPE:

D20: product type
/1: working section number

1) INLET ARRANGEMENT: pag. 10

IR 009 inlet side and valve type
150 setting (bar)
A G06 inlet position and available thread type


2) WORK SECTION ARRANGEMENT: pag. 14

W001A spool type
H005 spool actuation type
RP G06 type and thread section
01 PA 100 auxiliary valve (port A)
01 PB 100 auxiliary valve (port B)

3) OUTLET ARRANGEMENT: pag. 32

TJ outlet type
A G07 outlet position and available thread type

Ordering row 2 must be repeated for every work section

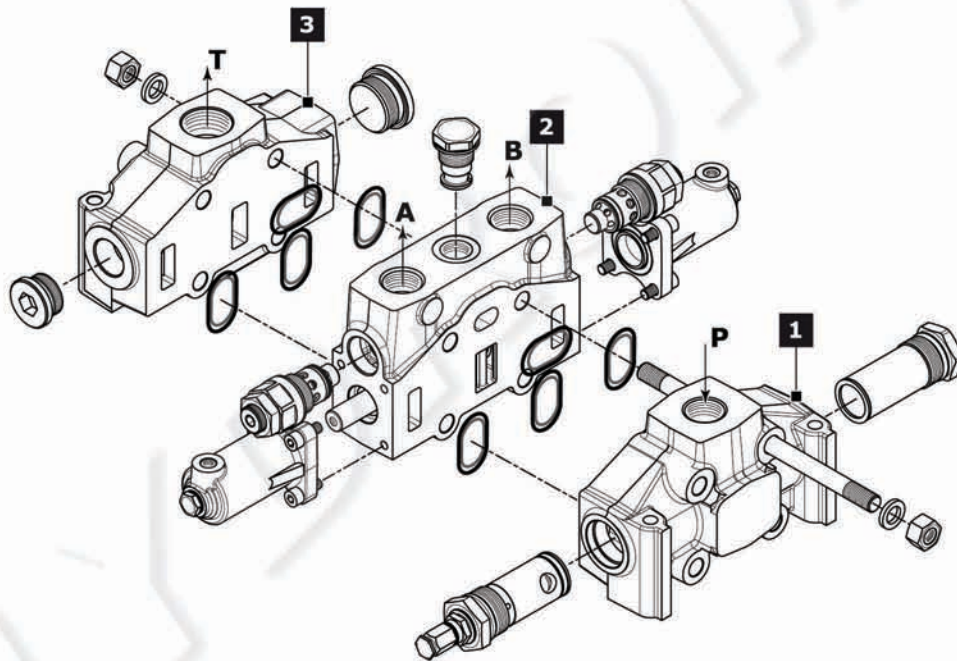


Standard thread

The connection ports size is indicated by an ordering code common for all Hydrocontrol products. Following table shows all available connections; for ordering code refer to table on page 40.

ports	BSP (ISO-228)		UN-UNF (ISO-725)		SAE 3000 (ISO 6162-1)		SAE 6000 (ISO 6162-6)	
Inlet Port (P)	G 1 - G 1 1/4	G06-G07	1 5/16 - 12 UNF	U06	1" MA - 1" UNC	S05-S06	3/4" MA - 3/4" UNC	S33-S34
Ports (A - B)	G 1 - G 1 1/4	G06-G07	1 5/16 - 12 UNF	U06	1" MA - 1" UNC	S05-S06	3/4" MA - 3/4" UNC	S33-S34
Outlet (T)	G 1 1/4	G07	1 5/16 - 12 UNF	U06	1 1/4 MA - 1 1/4 UNC	S07-S08	-	
Carry over (HPCO)	G 1 1/4	G07	1 5/8 - 12 UNF	U07	1 1/4 MA - 1 1/4 UNC	S07-S08	1" MA - 1" UNC	S35-S36
Hydraulic Pilot	G 1/4	G02	9/16" - 18 UNF	U02	-		-	
Pneumatic Pilot	G 1/8		NPTF 1/8-27					

Tie-rod kit classification (appendix "A")

Tie rod kit allows the correct assembly of sectional valves. Tie rod's length depends on the number of sections; each valve is assembled with tie rod kits including a tie rod, two nuts and two washers. D20 requires 4 tie-rod kits.

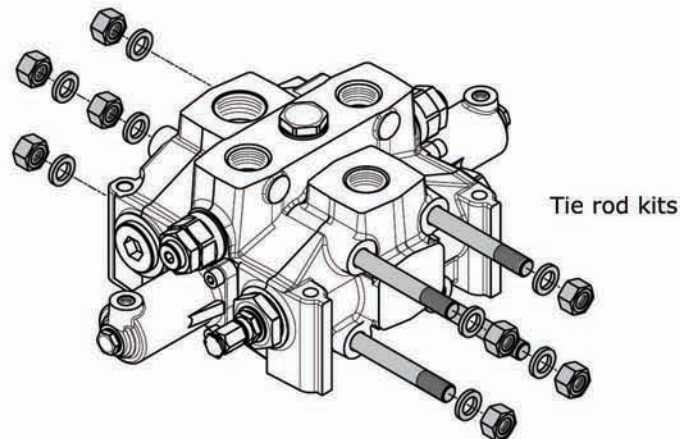

Tie rod kit	Order Code	Length (mm)	Clamping Torque (Nm)	Quantity
D20/1	300108001	248		
D20/2	300108002	312		
D20/3	300108003	376		
D20/4	300108004	440		
D20/5	300108005	504		
D20/6	300108006	568		
D20/7	300108007	632	110	4
D20/8	300108008	696		
D20/9	300108009	760		
D20/10	300108010	824		
D20/11	300108011	888		
D20/12	300108012	952		

Painting

On request, all Hydrocontrol valves can be delivered painted (RAL 9005 black primer).

Order example of D20/1 painted:


D20/1
 IR 009 150 A G06
 W001A H001 F001A RP G06 01 PA 100 01 PB 100
 TJ A G07

P006/1 N10

The painting is indicated with the following value:

P006 - /1 - N10

DIMENSIONS


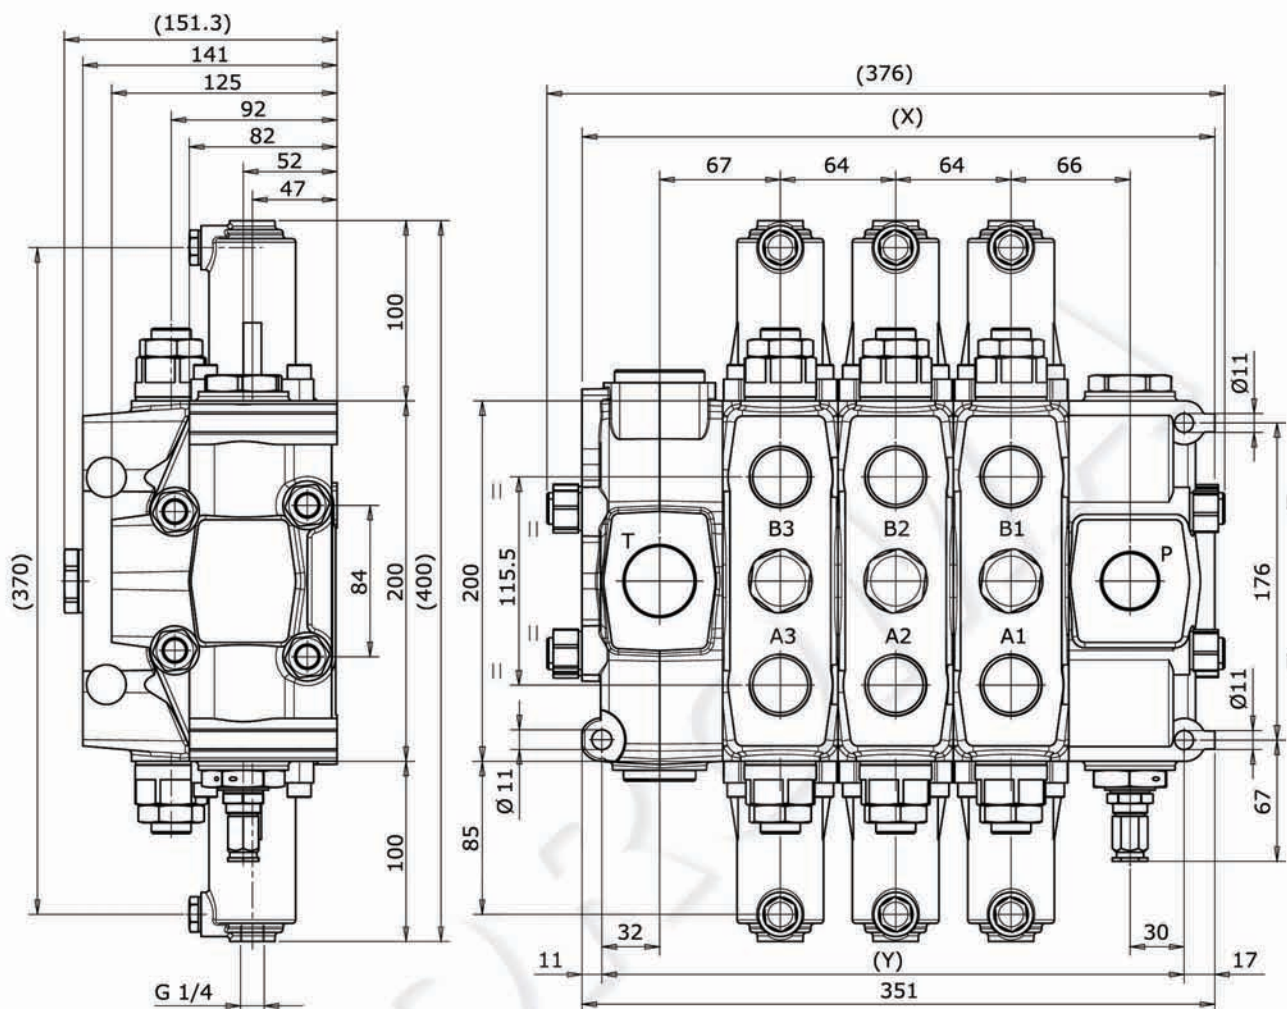


TYPE	/1	/2	/3	/4	/5	/6	/7	/8	/9	/10	/11	/12
X (mm)	195	259	323	387	451	515	579	643	707	771	835	899
Y (mm)	223	287	351	415	479	543	607	671	735	799	863	927
Weights (kg)	28,6	39,6	50,6	61,6	72,6	83,6	94,6	105,5	116,4	127,4	138,4	149,4



TYPICAL CURVES

Indicated values have been tested with standard sectional valve and W001A spool.



Pressure drop (P - T)

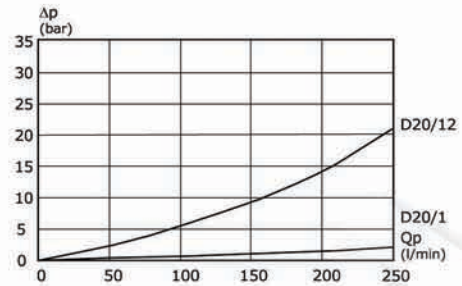

Pressure drop (P - A/B)

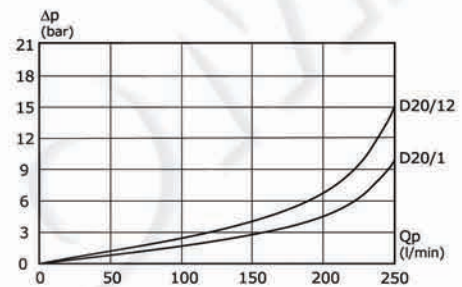


Pressure drop (A/B - T)

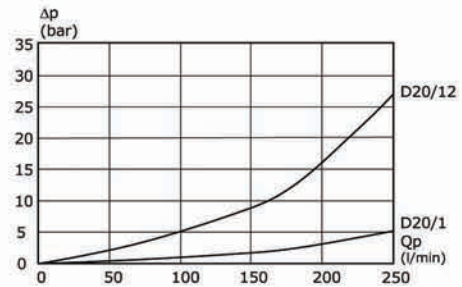

Pilot operated relief valve curve

Setting ranges	
type	pressure (bar)
A	0 - 350

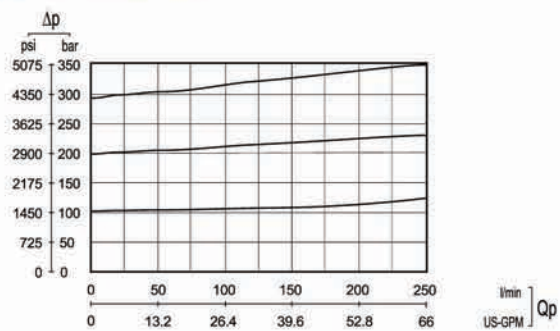


TYPICAL CURVES

Indicated values have been tested with standard sectional valve and W001A spool.


Antishock valve curve

Setting ranges		
type	pressure (bar)	
	at full flow	at min. flow
A	0 - 70	0-A / 50-A
A	71 - 120	51-A / 70-A
B	121 - 150	71-A / 110-A
C	151 - 300	111-A / 240-A
D	301 - 350	241-A / 350-A

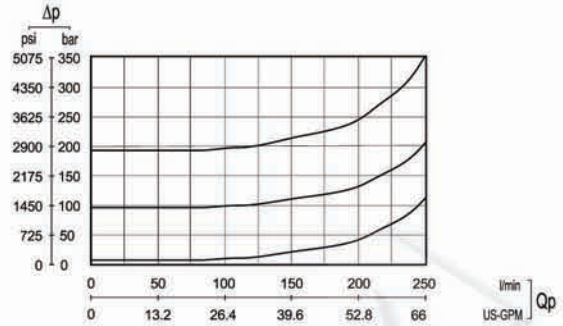


Combined valve curve


Setting ranges		
type	pressure (bar)	
	at full flow	at min. flow
A	50 - 130	20-A / 100-A
B	131 - 220	101-A / 220-A
C	221 - 260	221-A / 350-A

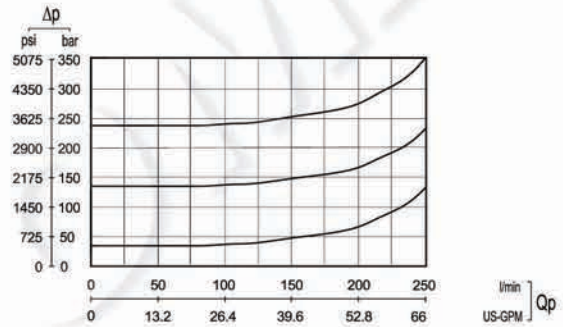

Main anticavitation check valve curve

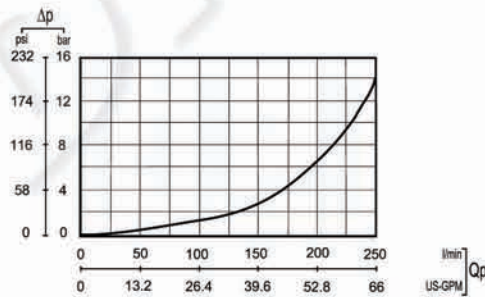

Anticavitation check valve curve

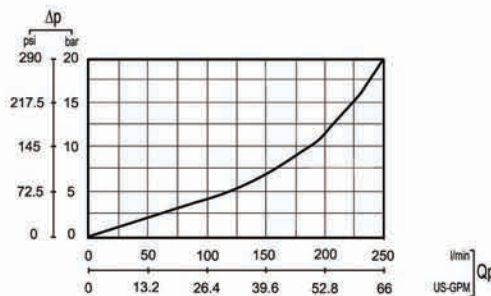


INLET SECTION

Order example

IR	009	150	A G05
----	-----	-----	-------


- IR** inlet side classification
- 1. 009** valve arrangement
- 150** setting (bar)
- 2. A G06** inlet position and available thread type

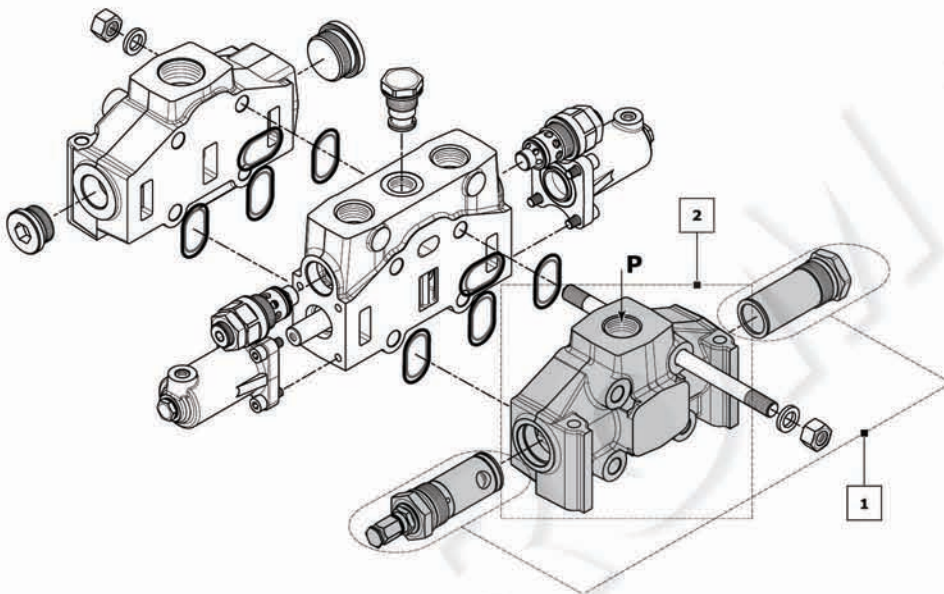

Rif.	Code	Description	Page
-	IR	Sectional valve with right inlet section	11
	IL	Sectional valve with left inlet section	
1	009	Pilot operated pressure relief valve	
	010	Pilot operated pressure relief valve and Main anticavitation check valve	12
	019	Without valves	
2	A G06	Upper inlet (thread G 1)	
	A G07	Upper inlet (thread G 1"1/4)	
	A U07	Upper inlet (thread 1"5/8 - 12 UNF)	13
	A S05	Upper inlet (thread SAE 3000 1" MA)	
	A S33	Upper inlet (thread SAE 6000 3/4" MA)	

NOTE: when ordering a relief valve it is necessary to specify factory setting (example 150).


Inlet side classifications

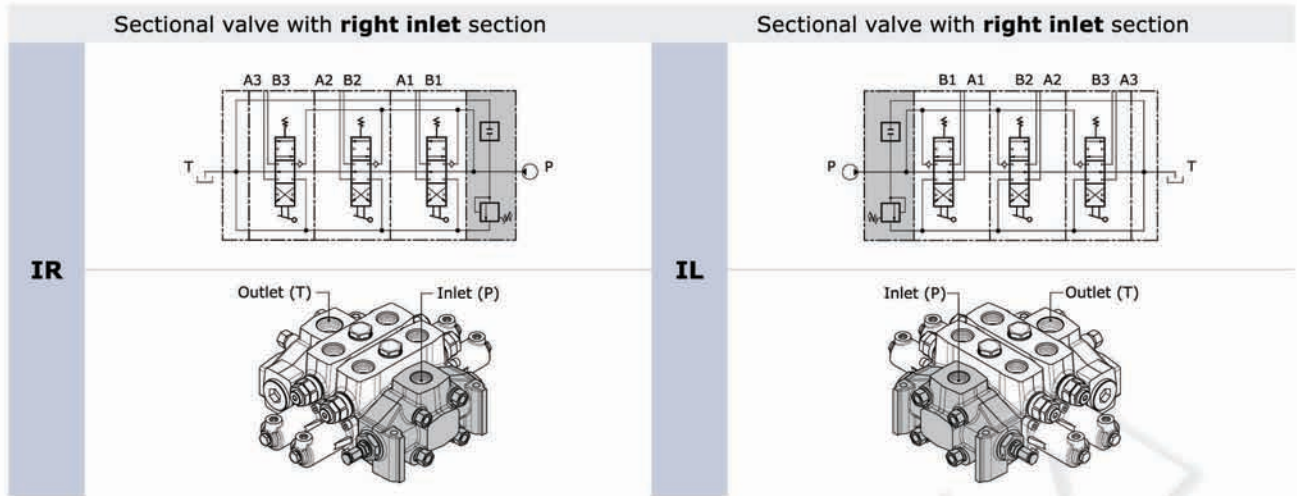

Valve identification

type	schema	layout	description	type	schema	layout	description
2			Pilot operated pressure relief valve	5			2 stage pilot operated relief valve
3			Relief valve plugged	6			Externally piloted valve
4			Main anticavitation check valve	11			Plug with pressure-gauge connection



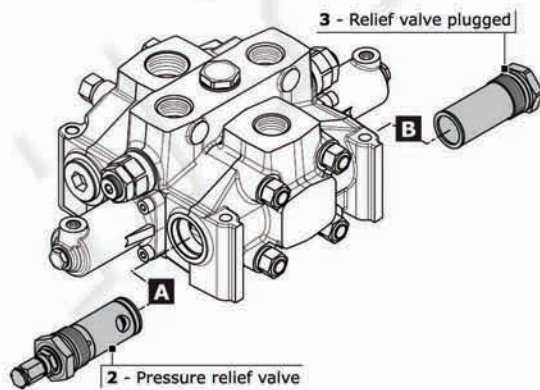









Valve arrangement



Combination valve example: 009 = 2A - 3B

- 009** Combination valve
- 2A** Pressure relief valve in port A
- 3B** Relief valve plugged in port B

The code identifies:
 with a number, the type of valve; with a letter its position on the inlet section.
 (A) = spool action side
 (B) = spool return action side
NOTE: when ordering a main relief valve it is necessary to specify setting

VALVE COMBINATION INLET SECTION		Valve type on port B						
								
		2	3	4	5	6	11	
Valve type on port A		2		009	010		011	016
		3	018	019	020	021	022	027
		4	029	030		031	032	037
		5		038				
		6	047	048				
		11	085					

NOTE: Valve combinations 021, and 038 requires double setting (see example).

Order example for inlet section: IR **038 200*280** A G05

038
200*380

valve combination _____
double range setting (bar) _____


Inlet combination and thread available

A G06	<p style="text-align: center;">Inlet (P)</p>	Upper inlet (thread G 1)
A G07		Upper inlet (thread G 1 1/4)
A U07		Upper inlet (thread 1 5/8 - 12 UNF)
A S05		Upper inlet (thread SAE 3000 - 1" MA)
A S06		Upper inlet (thread SAE 3000 - 1" UNC)
A S33		Upper inlet (thread SAE 6000 - 3/4" MA)
A S34		Upper inlet (thread SAE 6000 - 3/4" UNC)
B G06	<p style="text-align: center;">Inlet (P1)</p>	Upper inlet P1 with pressure-gauge connection G 1/4 (thread G 1)
B G07		Upper inlet P1 with pressure-gauge connection G 1/4 (thread G 1 1/4)
B U07		Upper inlet P1 with pressure-gauge connection G 1/4 (thread 1 5/8 - 12 UNF)
B S05		Upper inlet P1 with pressure-gauge connection G 1/4 (thread SAE 3000 - 1" MA)
B S06		Upper inlet P1 with pressure-gauge connection G 1/4 (thread SAE 3000 - 1" UNC)
B S33		Upper inlet P1 with pressure-gauge connection G 1/4 (thread SAE 6000 - 3/4" MA)
B S34		Upper inlet P1 with pressure-gauge connection G 1/4 (thread SAE 6000 - 3/4" UNC)
C G06	<p style="text-align: center;">Inlet (P)</p>	Central side inlet (thread G 1)
C G07		Central side inlet (thread G 1 1/4)
C U07		Central side inlet (thread 1 5/8 - 12 UNF)
C S05		Central side inlet (thread SAE 3000 - 1" MA)
C S06		Central side inlet (thread SAE 3000 - 1" UNC)
C S33		Central side inlet (thread SAE 6000 - 3/4" MA)
C S34		Central side inlet (thread SAE 6000 - 3/4" UNC)
D G06	<p style="text-align: center;">Inlet (P1)</p>	Central side inlet P1 with pressure-gauge connection G 1/4 (thread G 1)
D G07		Central side inlet P1 with pressure-gauge connection G 1/4 (thread G 1 1/4)
D U07		Central side inlet P1 with pressure-gauge connection G 1/4 (thread 1 5/8 - 12 UNF)
D S05		Central side inlet P1 with pressure-gauge connection G 1/4 (thread SAE 3000 - 1" MA)
D S06		Central side inlet P1 with pressure-gauge connection G 1/4 (thread SAE 3000 - 1" UNC)
D S33		Central side inlet P1 with pressure-gauge connection G 1/4 (thread SAE 6000 - 3/4" MA)
D S34		Central side inlet P1 with pressure-gauge connection G 1/4 (thread SAE 6000 - 3/4" UNC)

Order example:

W001A	H005	RP G06	01 PA 100	01 PB 100
--------------	-------------	---------------	------------------	------------------

- 1. **W001A** spool type
- 2. **H005** spool actuation type
- 3. **RP G06** section and thread type
- 4. **01 PA 100** auxiliary valve (port A - handle side)
- 5. **01 PB 100** auxiliary valve (port B - cap side)

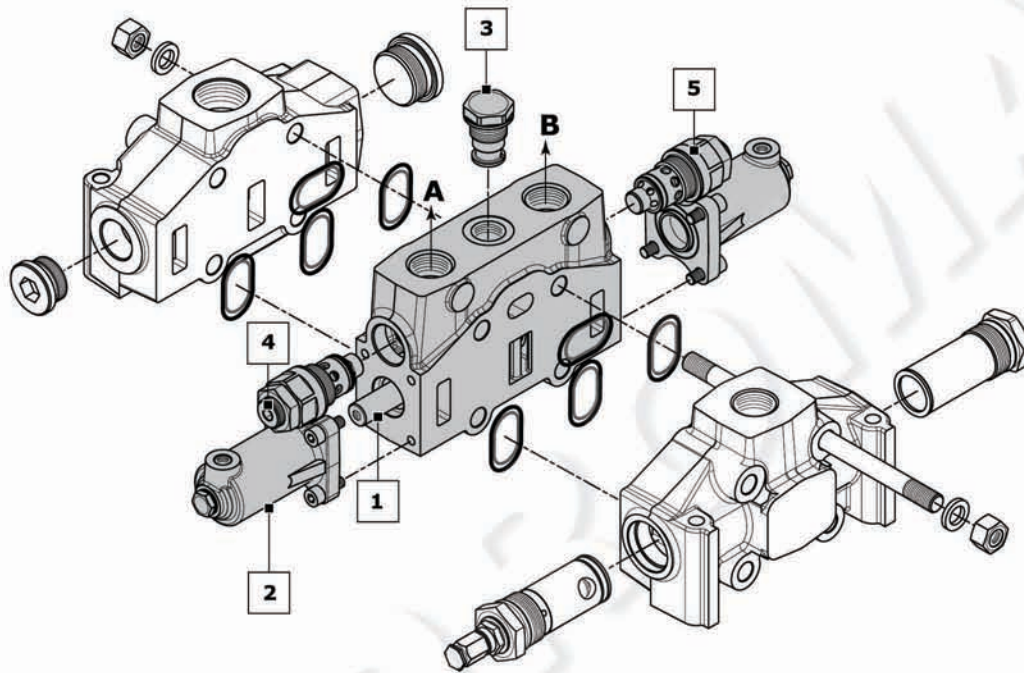














Rif.	Code	Description	Page
1	W001	3 positions double-acting	15
	W002	3 positions double-acting A-B to tank	
2	H101	Unprotected lever	17
	H005*	hydraulic actuation	
3	RP G06	Parallel circuit (G 1)	23
	RP U06	Parallel circuit (1"5/16-12 UNF)	
	RS G06	Series circuit (G 1)	
	RS U06	Series circuit (1"5/16-12 UNF)	
4	01 PA 100	Antishock valve (port A)	24
	05 PA	Prearrangement for auxiliary valve (port A)	
5	01 PB 100	Antishock valve (port B)	24
	05 PB	Prearrangement for auxiliary valve (port B)	




NOTE: (*) Leave out the spool return action code when choosing H005.
 Sections designed to house auxiliary valve option require double choice on work ports A and B.
 Always indicate setting value when using antishock and combined valve: **01 PA (100) - 03 PA (100)**

Spool identification

order example of spool: **W001 A J10**

W001 spool schema 3 positions double-acting
A spool type standard spool
J10 restricted service ports restriction on diameter (0,10 mm in A and B)

W001	3 positions double-acting	
W002	3 positions double-acting A and B to tank	
W003	3 positions double-acting A to tank B blocked	
W004	3 positions double-acting A blocked B to tank	
W005	3 positions single - acting on A	
W006	3 positions single - acting on B	
W009	3 positions double-acting with anticavitation valves	
W010	3 positions double-acting switch port closed (A - B blocked)	
W011	3 positions double-acting switch port closed (A - B to tank)	
W012	4 positions double-acting with float in the 4 th position	
W013	3 positions double-acting regenerative	
W015	3 positions double-acting series	
W016	3 positions double-acting series A and B to tank	

spools with restricted service ports				
code	circuit	restriction on diameter (mm)	section (mm ²)	hydraulic schema
J10	A-B IN T	0,10	4,08	
K10	A IN T	0,10	4,08	
Y10	B IN T	0,10	4,08	

CODE	spool type available	
	STANDARD	METERED
	A	B
W001	W001A	W001B
W002	W002A	W002B
W003	W003A	W003B
W004	W004A	W004B
W005	W005A	W005B
W006	W006A	W006B
W009	W009A	W009B
W010	W010A	
W011	W011A	
W012	W012A	
W013	W013A	
W015	W015A	
W016	W016A	

NOTE:

- W012, W013, spools need a special machining on the valve body.
- W015, W016, spools need RS type body.
- Float spool (W012) need special detent kit (F005).
- Regenerative spool (W013) need special return spring kits.
- Different spools are available on request.

Plaesee contact our Sales department for more information.

Spool actuation classification for manual control

code	description	dimensions	configuration
H004	Control without lever		
H101	Unprotected lever		
H102	Unprotected lever rotated 180°		


Spool actuation classification for Hydraulic control

code	description	dimensions	configuration
H005 leave out the spool return action code	Hydraulic actuation with side ports BSP ports = G 1/4 UNF ports = 9/16-18 UNF		
H006 leave out the spool return action code	Hydraulic actuation with side ports and cast-iron end caps BSP ports = G 1/4 UNF ports = 9/16-18 UNF		

Spool return action classification - Springs load values

Spool return kits have three different spring types; following the codes depending on spring loads.

Spring type			
Code	A (standard spring)	B (soft spring)	C (heavy spring)
Preloading	196.2 N	145.1 N	313.9 N
End of stroke	245.2 N	176.6 N	412 N
Spool return action identification example			
Code	F001A	F001B	F001C

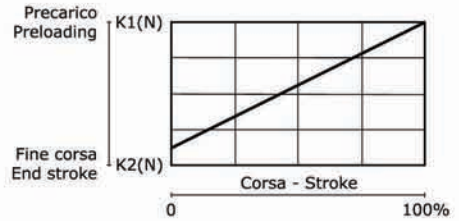

Spool return action classification


code	description	schema	dimensions	configuration
F001A F001B F001C	3 positions spring-centred spool			
F002A	3 positions spring-centred spool detent in A and B			
F003A	3 positions spring-centred spool detent in A			
F004A	3 positions spring-centred spool detent in B			
F005A	4 positions spring-centred spool detent in 4 th position (only for W012 spool)			
F013A F013B F013C	3 positions spring-centred spool prearrangement dual command			

Pneumatic control classification

code	description	schema	dimensions	configuration
F020A	Pneumatic control ON - OFF			
F021A	Pneumatic control ON - OFF rotated 180°			
F022A	Proportional Pneumatic control		Proportional control with port BSP: G 1/4	
F023A	Proportional Pneumatic control rotated 180°			
F135A	Pneumatic control ON - OFF			
F136A	Pneumatic control ON - OFF rotated 180°			
F126A	Proportional Pneumatic control		Proportional control with port NPTF: 1/8-27	
F127A	Proportional Pneumatic control rotated 180°			

Proportional pneumatic control curve


The diagram shows the spool stroke as a function of the pneumatic pressure operating.

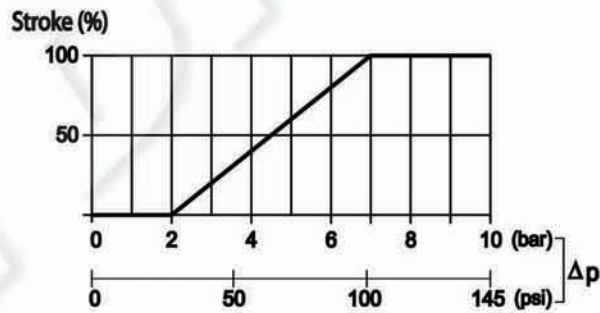


Electrohydraulic control specifications

Operating temperature range	-20°C / +80°C
Max inlet pressure	350 bar
Reduced pressure	16 bar
Back pressure on (T)	3 bar
Filtering degree	25 μ assoluti
Raccomanded pilot pipe size	Ø 6 mm - G 1/4

Electrohydraulic ON-OFF control with fixed pressure reducing valve

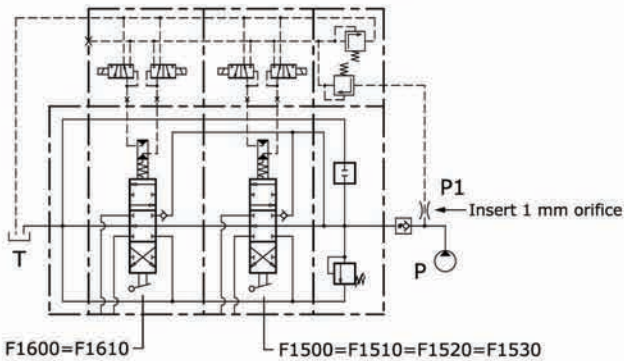

Electrohydraulic PROPORTIONAL control with fixed pressure reducing valve

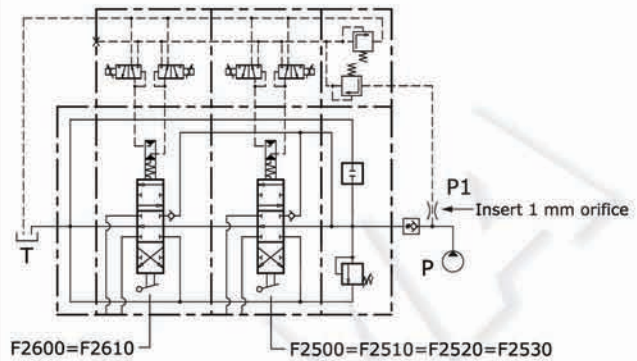

Proportional control kit, mechanically retrooperated, allows the maximum precision of positioning, limiting the hysteresis. The control is operated with PWM control of the current. PWM frequency suggest: 60-80 Hz



Nominal voltage (V)	regulation currents		
	Resistance R ₂₀ (Ohm)	Current min (A)	Current max (A)
12 vdc	3,7	0,9	1,7
24 vdc	15,5	0,45	0,85

Electrohydraulic control classification

code	description	dimensions	configuration
F1600	3 positions electrohydraulic control ON - OFF 12 Vdc		
F1610	3 positions electrohydraulic control ON - OFF 24 Vdc		
F2600	3 positions electrohydraulic control PROPORTIONAL 12 Vdc		
F2610	3 positions electrohydraulic control PROPORTIONAL 24 Vdc		

Electrohydraulic ON-OFF control is stackable with electrohydraulic PROPORTIONAL control (F2600 = F2610). Control kit already includes orifice to make spool displacement more gradual.

Electrohydraulic control with fixed pressure reducing valve classification

code	description	configuration
F1500	Electrohydraulic control ON - OFF (fixed pressure reducing valve) P - T inlet side (12 vdc)	 <p>Port BSP (P - T) = G 1/4 Port UNF (P - T) = 9/16"18 UNF</p>
F1510	Electrohydraulic control ON - OFF (fixed pressure reducing valve) P - T inlet side (24 vdc)	
F2500	Electrohydraulic control PROPORTIONAL (fixed pressure reducing valve) P - T inlet side (12 vdc)	
F2510	Electrohydraulic control PROPORTIONAL (fixed pressure reducing valve) P - T inlet side (24 vdc)	
F1520	Electrohydraulic control ON - OFF (fixed pressure reducing valve) P inlet - T outlet (12 vdc)	 <p>Port BSP (P - T) = G 1/4 Port UNF (P - T) = 9/16"18 UNF</p>
F1530	Electrohydraulic control ON - OFF (fixed pressure reducing valve) P inlet - T outlet (24 vdc)	
F2520	Electrohydraulic control PROPORTIONAL (fixed pressure reducing valve) P inlet - T outlet (12 vdc)	
F2530	Electrohydraulic control PROPORTIONAL (fixed pressure reducing valve) P inlet - T outlet (24 vdc)	

Control tie rod assembly

The length of the control tie rod, will change depending on the section numbers; in this way it will be easy to install in the right way the sections and avoid any misassembly. Each kit is composed by 2 tie rods, 2 plugs, 2 connection ports and spacers according to the section number.


NOTE: the control tie rod kit has always to be ordered separately.

Reducing valve, combined with electrohydraulic control kit has to be calculated as a normal working section.

ORDER EXAMPLE:

Complete valves with 3 sections F1600 requires a complete tie-rod kit /3.

Complete valves with 2 sections F1600 and 1 section with F1500 (reducing valve) requires a complete tie-rod kit /4.

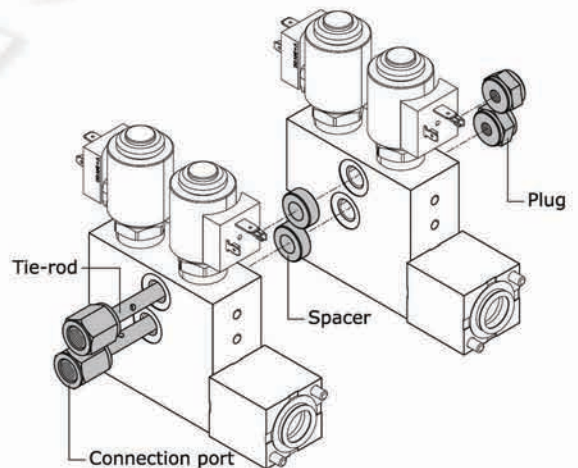

Order code fixed pressure reducing valve:

915000303 = reducing valve for BSP ports

915000312 = reducing valve for UNF ports

Order code for control tie rod (BSP):

- 320103001** = control tie rod /1
- 320108001** = control tie rod /2
- 320108002** = control tie rod /3
- 320108003** = control tie rod /4
- 320108004** = control tie rod /5
- 320108005** = control tie rod /6
- 320108006** = control tie rod /7
- 320108007** = control tie rod /8
- 320108008** = control tie rod /9

Order code for control tie rod (UNF):

- 320103026** = control tie rod /1
- 320108012** = control tie rod /2
- 320108013** = control tie rod /3
- 320108014** = control tie rod /4
- 320108015** = control tie rod /5
- 320108016** = control tie rod /6
- 320108017** = control tie rod /7
- 320108018** = control tie rod /8
- 320108019** = control tie rod /9

Compatibility table

SPOOL ACTION TYPE	SPOOL TYPE																				
	W001A	W001B	W002A	W002B	W003A	W003B	W004A	W004B	W005A	W005B	W006A	W006B	W009A	W009B	W010A	W011A	W012A	W013A	W015A	W016A	
H101	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
H102	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
H004	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
H005	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
H006	•	•	•	•	•	•	•	•					•	•				•		•	•
SPOOL RETURN ACTION TYPE	SPOOL TYPE																				
	W001A	W001B	W002A	W002B	W003A	W003B	W004A	W004B	W005A	W005B	W006A	W006B	W009A	W009B	W010A	W011A	W012A	W013A	W015A	W016A	
F001	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•
F002	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•
F003	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•
F004	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•
F005																	•				
F013	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•
F020=F021	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•
F022=F023	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•
F135=F136	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•
F126=F127	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•
F0620=F0630	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•
F1500=F1510	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•
F1520=F1530	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•
F2500=F2510	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•
F2520=F2530	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•
F1600=F1610	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•

Work section identification

working section type	
RP G06	
RP G07	
RP U06	
RP S05	
RP S06	
RP S33	
RP S34	

Parallel circuit section









When the spool is operated it intercepts the by-pass gallery by diverting the flow of oil to service port A or B. If two or more spools are actuated at the same time, the oil will power the service port that has the lower load; by throttling the spools, the flow of oil can be divided between two or more service ports.









RS G06	
RS G07	
RS U06	
RS S05	
RS S06	
RS S33	
RS S34	

Series circuit section

When the spool is operated it intercepts the switch gallery by diverting the flow of oil to service port A or B. The oil that flows back from the actuator is carried to the switch gallery thus making it available to the service ports downstream from the series section. The pressure drop downstream is added to the pressure drop of the section itself.

Auxiliary valve identification

code	description	schema	configuration	setting range (bar)			
				type	at full flow	type	at min. flow
01 PA	Antishock valve (port A)			A	0 / 70	A	0-A / 50-A
				B	71 / 120	B	51-A / 70-A
				C	121 / 150	C	71-A / 110-A
				D	151 / 300	D	111-A / 240-A
				E	301 / 350	E	241-A / 350-A
02 PA	Anticavitation valve (port A)						
04 PA	Pilot combined valve (port A)			A	30 / 110		
				B	111 / 350		
05 PA	Prearrangement for auxiliary valve (port A)						

code	description	schema	configuration	setting range (bar)			
				type	at full flow	type	at min. flow
01 PB	Antishock valve (port B)			A	0 / 70	A	0-A / 50-A
				B	71 / 120	B	51-A / 70-A
				C	121 / 150	C	71-A / 110-A
				D	151 / 300	D	111-A / 240-A
				E	301 / 350	E	241-A / 350-A
02 PB	Anticavitation valve (port B)						
04 PB	Pilot combined valve (port B)			A	30 / 110		
				B	111 / 350		
05 PB	Prearrangement for auxiliary valve (port B)						

Auxiliary valve - Setting range

Sections designed to house auxiliary valve option require double choice on work ports A and B. Always indicate setting value when using antishock valve and pilot combined valve:


- 01 PA (120) = setting at full flow**
- 01 PA (120-A) = setting at min. flow**
- 04 PA (120) = setting at min. flow**

INTERMEDIATE INLET SECTION

Order example

BE	009	150	A G06
-----------	------------	------------	--------------

- BE** inlet side
- 1. **009** valve arrangement
- 150** setting (bar); when ordering a main relief valve it is necessary to specify setting
- 2. **A G06** inlet position and available thread type

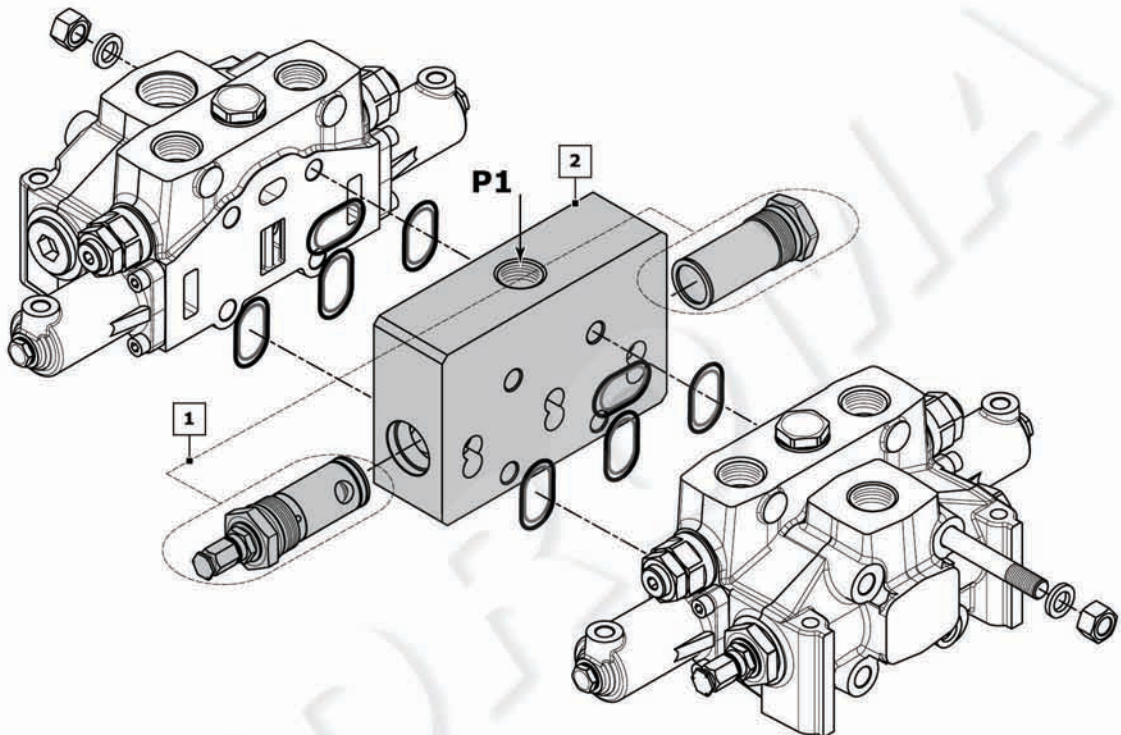

Rif.	Code	Description	Page
-	BE	Intermediate inlet section	26
	BV*	Intermediate inlet section with pressure relief valve	
1	009	Pilot operated pressure relief valve	27
	010	Pilot operated pressure relief valve and Main anticavitation check valve	
	019	Without valves	
	020	Main anticavitation check valve	
2	A G06	Upper inlet (thread G 1)	
	A U06	Upper inlet (thread 1"5/16-12 UNF)	

NOTE: when ordering a relief valve it is necessary to specify factory setting (example 150).
 * = omit the code for inlet positioning and thread

Intermediate inlet section classifications

intermediate inlet type

BE			Intermediate inlet section
-----------	--	--	----------------------------

The intermediate inlet section is driven by two pumps (P + P1). The downstream elements can be set to a lower pressure than the upstream ones by adjusting the pressure relief valve of the intermediate section in question.


BV			Intermediate inlet section with pressure relief valve
-----------	--	--	---

The intermediate inlet section and the elements are driven by a single pump (P). The downstream elements can be set to a lower pressure than the upstream ones by adjusting the pressure relief valve of the intermediate section in question.

Valve identification on intermediate inlet section

type	schema	layout	description	type	schema	configurazione	descrizione
2			Pilot operated pressure relief valve	4			Externally piloted valve
3			Relief valve plugged	11			Plug with pressure-gauge connection

Valve arrangement on intermediate inlet section

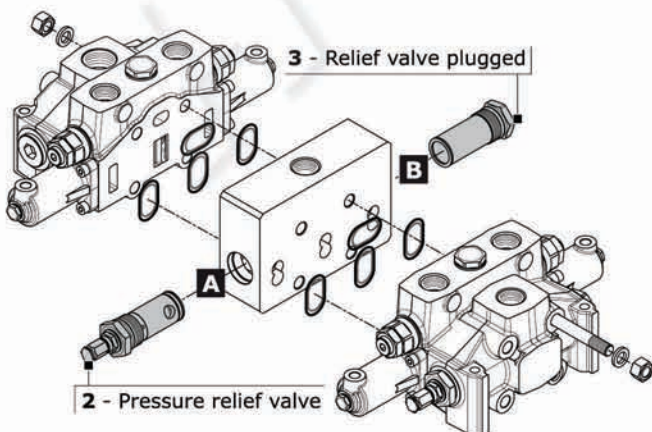

Combination valve example: 009 = 2A - 3B

- 009** Combination valve
- 2A** Pressure relief valve in port A
- 3B** Relief valve plugged in port B

The code identifies:
with a number, the type of valve; with a letter its position on the inlet section.

- (A) = spool action side
- (B) = spool return action side

NOTE: when ordering a main relief valve it is necessary to specify setting

VALVE COMBINATION INLET SECTION		Valve type on port B			
		2	3	4	11
Valve type on port A	2		009	010	016
	3	018	019	020	027
	4	029	030		
	11	085	086		

Inlet combination and thread available

A G06

A G07


A U06

A S05

A S06

A S33

A S34

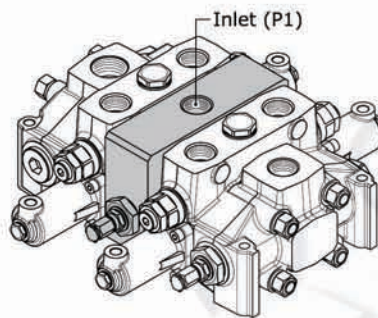

Upper inlet

Complete configuration samples for D20/2 with intermediate inlet section (BE)


IR 009 150 A G06 Right inlet section

W001A H101 F001A RP G06..... Working section

BE 009 150 A G06Intermediate inlet section

W001A H101 F001A RP G06..... Working section

TJ A G07 Outlet section

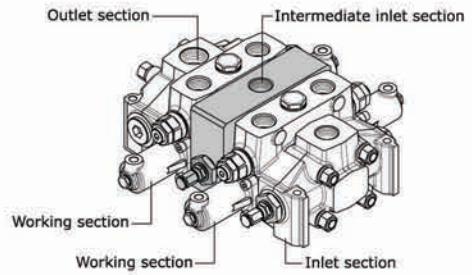

Complete configuration samples for D20/2 with intermediate inlet section (BV)


IR 009 150 A G06 Right inlet section

W001A H101 F001A RP G06..... Working section

BV 009 150Intermediate inlet section

W001A H101 F001A RP G06..... Working section

TJ A G07 Outlet section

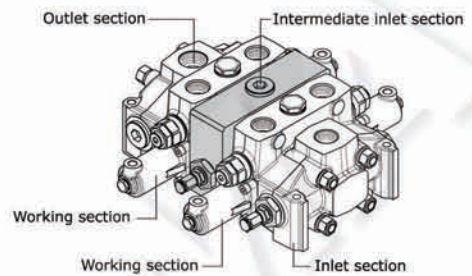


INTERMEDIATE OUTLET SECTION

Order example

BF | **A G07**

1. **BF** inlet side _____
A G07 inlet position and available thread type _____

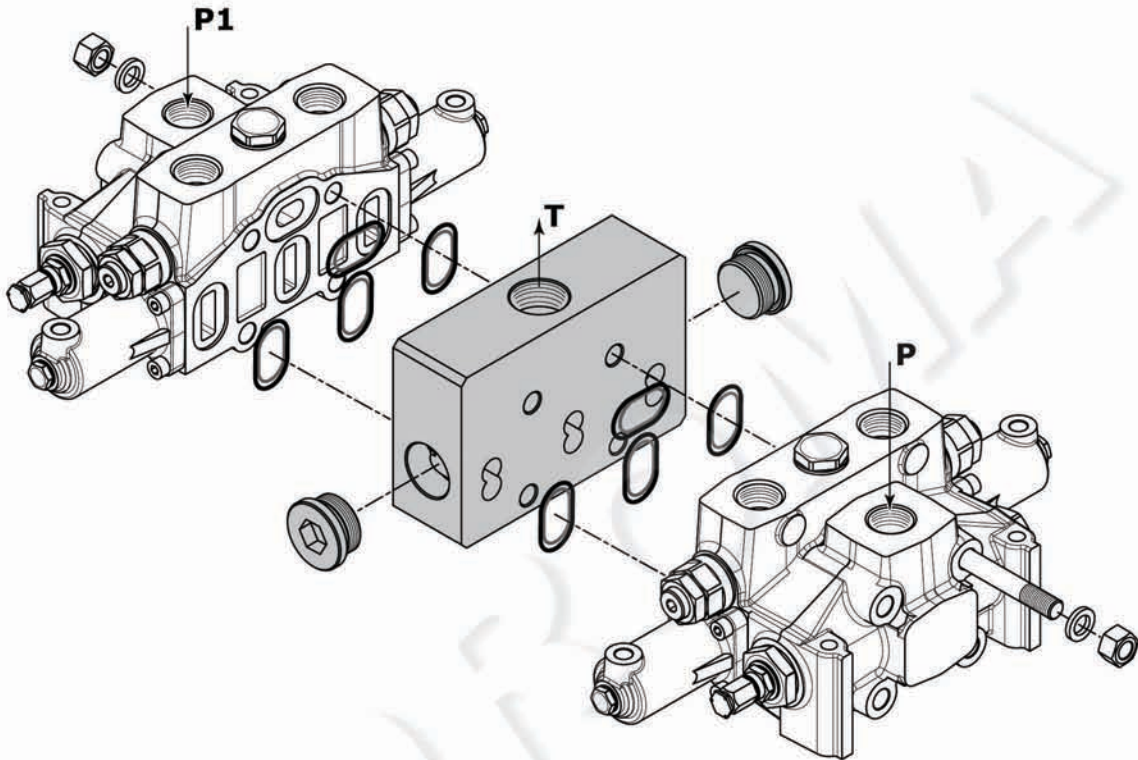

Rif.	Code	Type	Description	Page
-	BF		Intermediate outlet section with single tank return	
	BG		Intermediate outlet section with two tank returns	
1	A G07		Upper outlet (thread G 1"1/4)	30
	A U07		Upper outlet (thread 1"5/8-12 UNF)	
	G G07	for	Front outlet side A (thread G 1"1/4)	
	G U07	BF	Front outlet side A (thread 1"5/8-12 UNF)	
	H G07		Rear outlet side B (thread G 1"1/4)	
	H U07		Rear outlet side B (thread 1"5/8-12 UNF)	
	J G07	for	Upper outlet HPCO - front side A and rear side B to T (thread G 1"1/4)	
	J U07	BG	Upper outlet HPCO-front side A and rear side B to T (thread 1"5/8-12 UNF)	

Intermediate outlet section classifications

intermediate outlet type

BF		<p>Intermediate outlet section with single tank return</p>
-----------	--	--

The above outlet section allows the flow of oil of the two pumps and the tank ports to be piped to a single outlet T.

BG		<p>Intermediate outlet section with two tank returns</p>
-----------	--	--


The section in question allows the flow of oil of the two pumps to be piped in two outlets: HPCO for powering another directional control valve, T for discharge of the work ports. In order to obtain this, the two T need to be linked.

Outlet position and available thread type (for BF intermediate)

Outlet combination and thread available

A G07		Upper outlet (T)
A U07		
A S07		
A S08		
G G07		Front outlet side A (T)
G U07		
G S07		
G S08		
H G07		Rear outlet side B (T)
H U07		
H S07		
H S08		

Outlet position and available thread type (for BG intermediate)

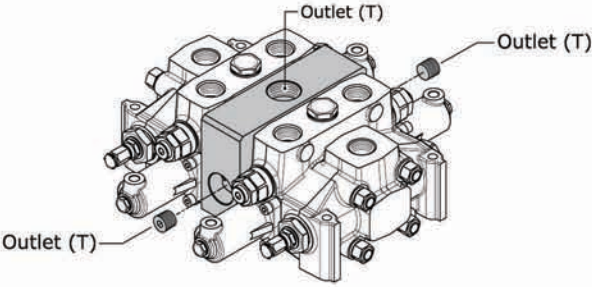Inlet combination and thread available	
J G07	
J U07	
J S07	
J S08	

Upper outlet HPCO
front side A and
rear side B to T

Complete configuration samples for D20/2 with intermediate outlet section (BF)


IR 009 150 A G06 Right inlet section

W001A H101 F001A RP G06..... Working section

BF A G07Intermediate outlet section

W001A H101 F001A RP G06..... Working section

IL 009 150 A G06..... Left inlet section

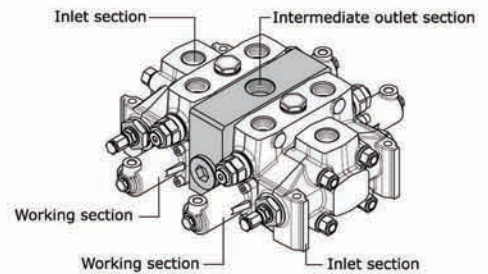

Complete configuration samples for D20/2 with intermediate outlet section (BG)


IR 009 150 A G06 Right inlet section

W001A H101 F001A RP G06..... Working section

BG J G07Intermediate outlet section


W001A H101 F001A RP G06..... Working section

IL 009 150 A G06..... Left inlet section

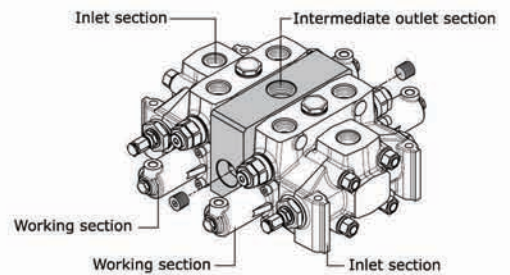

OUTLET SECTION (VERSION 1 OUTLET)

Order example

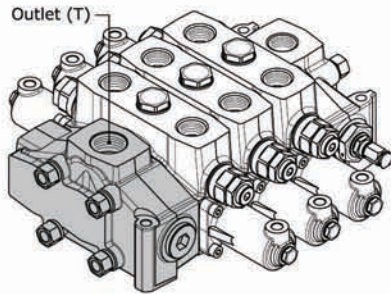


- | | | | |
|--|-----------|--|--------------|
| | TJ | | A G07 |
|--|-----------|--|--------------|
- TJ** outlet section type
 - A G07** outlet position and available thread type

Rif.	Code	Description	Page
1	TJ	Outlet section with single return (T) right-side inlet (P)	33
	TK	Outlet section with single return (T) left-side inlet (P)	
2	A G07	Upper outlet (thread G 1"1/4)	
	A U07	Upper outlet (thread 1"5/8-12 UNF)	
	A S07	Upper outlet (thread SAE 3000 - 1"1/4 MA)	
	A S08	Upper outlet (thread SAE 3000 - 1"1/4 UNC)	
	C G07	Central outlet (thread G 1"1/4)	
	C U07	Central outlet (thread 1"5/8-12 UNF)	
	C S07	Central outlet (thread SAE 3000 - 1"1/4 MA)	
	C S08	Central outlet (thread SAE 3000 - 1"1/4 UNC)	

OUTLET SECTION (HPCO VERSION OUTLET)


Order example - HPCO version Outlet

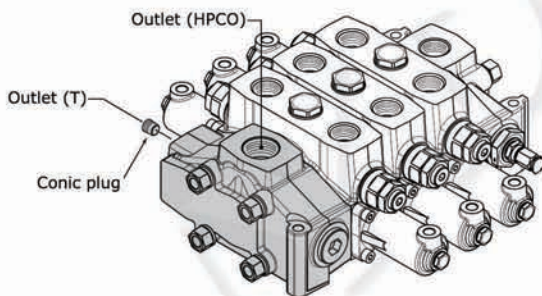

- | | | | |
|--|-----------|--|--------------|
| | TM | | M G07 |
|--|-----------|--|--------------|
- TM** outlet section type
 - M G07** outlet position and available thread type

Rif.	Code	Description	Page
1	TM	Outlet section with two return (T-HPCO) right-side inlet (P)	34
	TN	Outlet section with two return (T-HPCO) left-side inlet (P)	
2	M G07	HPCO upper outlet T (tank) rear outlet side B (thread G 1"1/4)	
	M U07	HPCO upper outlet T (tank) rear outlet side B (thread 1"5/8-12 UNF)	
	M S07	HPCO upper outlet T (tank) rear outlet side B (thread SAE 3000 - 1"1/4 MA)	
	M S08	HPCO upper outlet T (tank) rear outlet side B (thread SAE 3000 - 1"1/4 UNC)	
	N G07	HPCO upper outlet T (tank) front outlet side A (thread G 1"1/4)	
	N U07	HPCO upper outlet T (tank) front outlet side A (thread 1"5/8-12 UNF)	
	N S07	HPCO upper outlet T (tank) front outlet side A (thread SAE 3000 - 1"1/4 MA)	
	N S08	HPCO upper outlet T (tank) front outlet side A (thread SAE 3000 - 1"1/4 UNC)	

Outlet with single tank classification


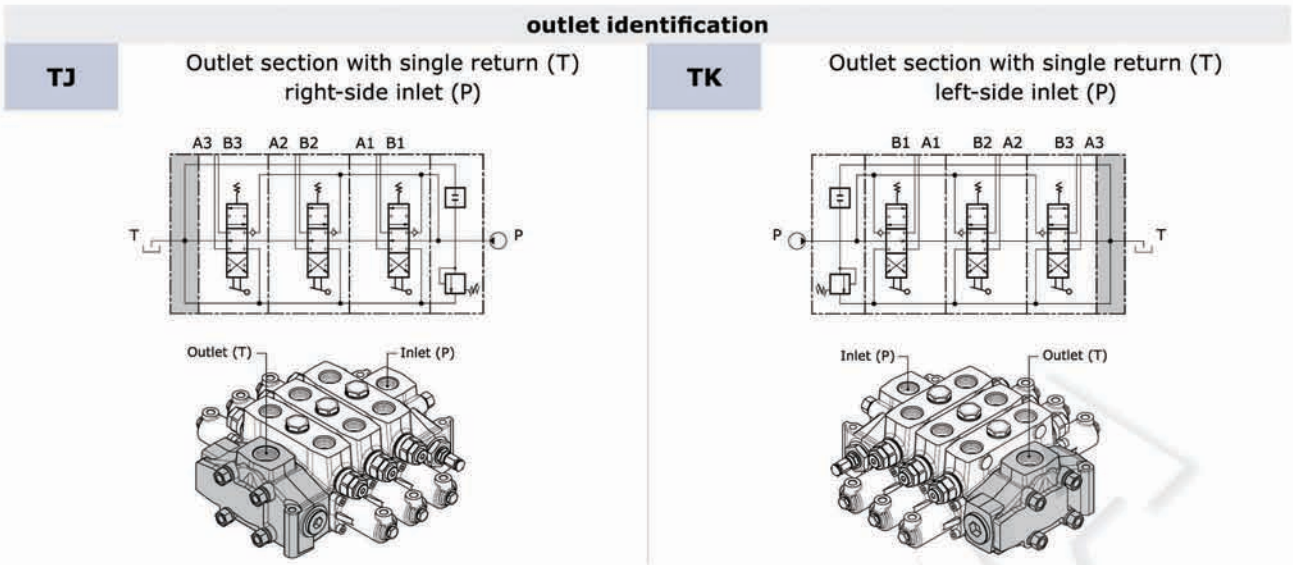


outlet combination and thread available

A G07			Upper outlet (thread G 1"1/4)
A U07			Upper outlet (thread 1"5/8 - 12 UNF)
A S07			Upper outlet (thread SAE 3000 - 1"1/4 MA)
A S08			Upper outlet (thread SAE 3000 - 1"1/4 UNC)
C G07			Central outlet (thread G 1"1/4)
C U07			Central outlet (thread 1"5/8 - 12 UNF)
C S07			Central outlet (thread SAE 3000 - 1"1/4 MA)
C S08			Central outlet (thread SAE 3000 - 1"1/4 UNC)
F G07			Lateral outlet (thread G 1"1/4)
F U07			Lateral outlet (thread 1"5/8 - 12 UNF)
G G07		only for TK	Front outlet side A (thread G 1"1/4)
G U07			Front outlet side A (thread 1"5/8 - 12 UNF)
G S07			Front outlet side A (thread SAE 3000 - 1"1/4 MA)
G S08			Front outlet side A (thread SAE 3000 - 1"1/4 UNC)
H G07		only for TJ	Rear outlet side B (thread G 1"1/4)
H U07			Rear outlet side B (thread 1"5/8 - 12 UNF)
H S07			Rear outlet side B (thread SAE 3000 - 1"1/4 MA)
H S08			Rear outlet side B (thread SAE 3000 - 1"1/4 UNC)

Outlet with two tanks classification

outlet identification

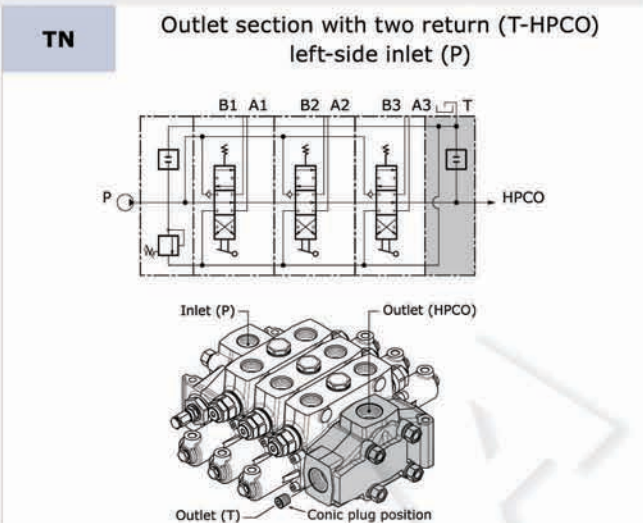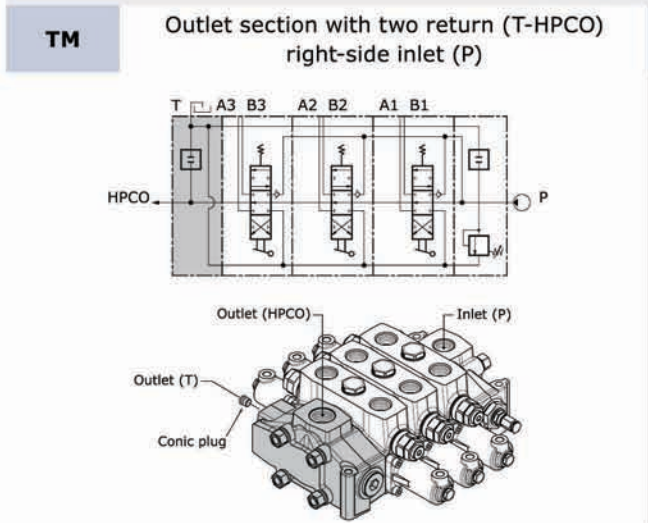


outlet combination and thread available


M G07		only for TM	HPCO Upper outlet T rear outlet side B (thread G 1 1/4)	Q G07		only for TN	HPCO Central outlet T front outlet side A (thread G 1 1/4)	
M U07			HPCO Upper outlet T rear outlet side B (thread 1 5/8-12 UNF)	Q U07			HPCO Central outlet T front outlet side A (thread 1 5/8-12 UNF)	
M S07			HPCO Upper outlet T rear outlet side B (thread SAE 3000 3/4 MA)	Q S07			HPCO Central outlet T front outlet side A (thread SAE 3000 3/4 MA)	
M S08			HPCO Upper outlet T rear outlet side B (thread SAE 3000 3/4 UNC)	Q S08			HPCO Central outlet T front outlet side A (thread SAE 3000 3/4 UNC)	
M S35			HPCO Upper outlet T rear outlet side B (thread SAE 6000 1" MA)	Q S35			HPCO Central outlet T front outlet side A (thread SAE 6000 1" MA)	
M S36			HPCO Upper outlet T rear outlet side B (thread SAE 6000 1" UNC)	Q S36			HPCO Central outlet T front outlet side A (thread SAE 6000 1" UNC)	
N G07		only for TN	HPCO Upper outlet T front outlet side A (thread G 1 1/4)	R G07		only for TM	HPCO Upper outlet T rear outlet side B (thread G 1 1/4)	
N U07			HPCO Upper outlet T front outlet side A (thread 1 5/8-12 UNF)				R U07	HPCO Upper outlet T rear outlet side B (thread 1 5/8-12 UNF)
N S07			HPCO Upper outlet T front outlet side A (thread SAE 3000 3/4 MA)					HPCO Upper outlet T rear outlet side B (thread SAE 3000 3/4 MA)
N S08			HPCO Upper outlet T front outlet side A (thread SAE 3000 3/4 UNC)					HPCO Upper outlet T rear outlet side B (thread SAE 3000 3/4 UNC)
N S35			HPCO Upper outlet T front outlet side A (thread SAE 6000 1" MA)					HPCO Upper outlet T rear outlet side B (thread SAE 6000 1" MA)
N S36			HPCO Upper outlet T front outlet side A (thread SAE 6000 1" UNC)					HPCO Upper outlet T rear outlet side B (thread SAE 6000 1" UNC)
P G07		only for TM	HPCO Central outlet T rear outlet side B (thread G 1 1/4)	S G07		only for TN		HPCO Upper outlet T side outlet A (thread G 1 1/4)
P U07			HPCO Central outlet T rear outlet side B (thread 1 5/8-12 UNF)				S U07	HPCO Upper outlet T side outlet A (thread 1 5/8-12 UNF)
P S07			HPCO Central outlet T rear outlet side B (thread SAE 3000 3/4 MA)					HPCO Upper outlet T side outlet A (thread SAE 3000 3/4 MA)
P S08			HPCO Central outlet T rear outlet side B (thread SAE 3000 3/4 UNC)					HPCO Upper outlet T side outlet A (thread SAE 3000 3/4 UNC)
P S35			HPCO Central outlet T rear outlet side B (thread SAE 6000 1" MA)					HPCO Upper outlet T side outlet A (thread SAE 6000 1" MA)
P S36			HPCO Central outlet T rear outlet side B (thread SAE 6000 1" UNC)					HPCO Upper outlet T side outlet A (thread SAE 6000 1" UNC)

CARRY-OVER CONNECTION (HPCO)

This option, available on all D20, allows the sectional valve to feed a second valve, by extending the free flow channel. In this configuration, the valve need a separated port for connection to tank.

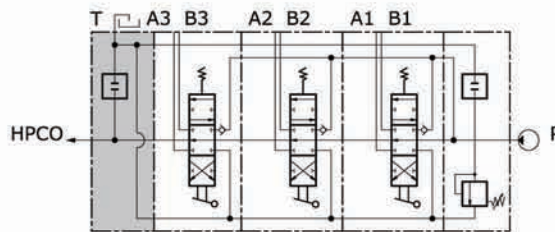


It is possible to transform sectional valve from standard to HPCO version just by ordering the appropriate conic plug:

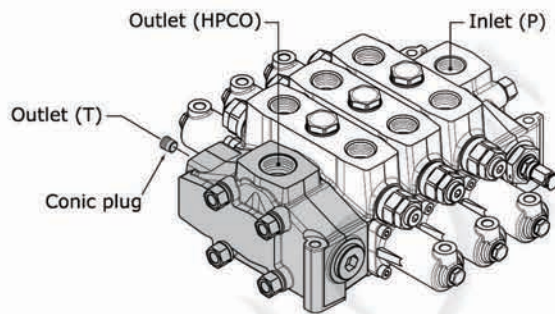


code (HPCO Plug identification)	description	q.ty
413010201	conic plug G 1/2 x 17	1

D20 SPARE PARTS LIST

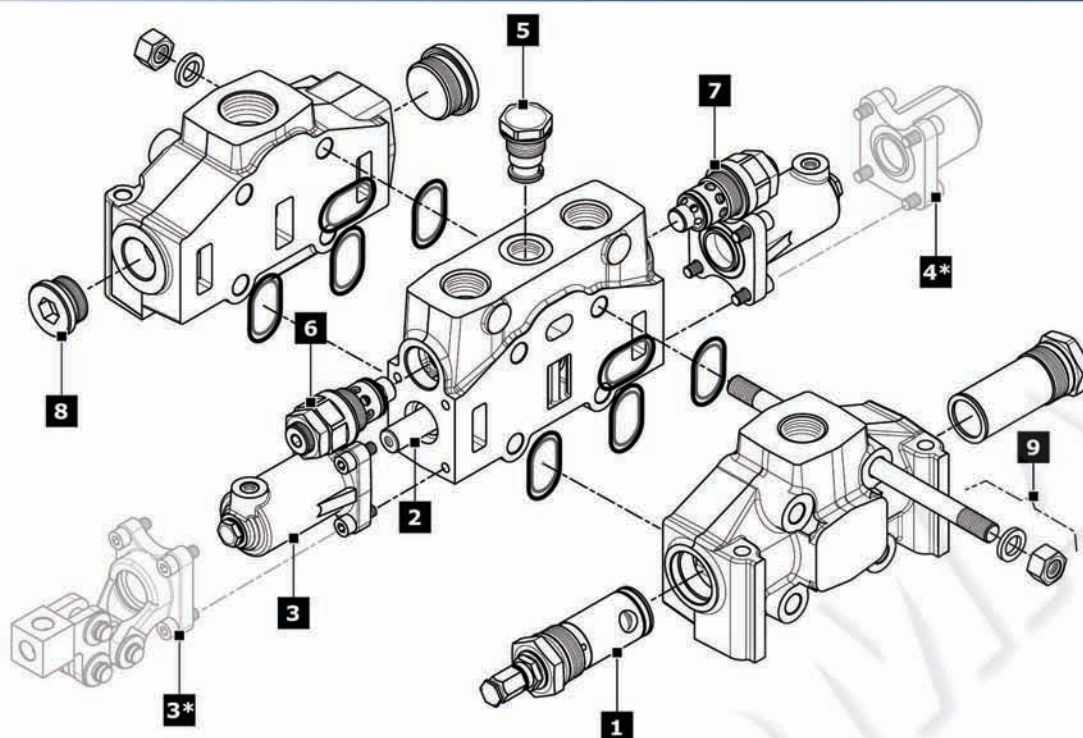

Ref.	Description	Order code	Q.ty	Code	Note
		30168			Setting: 100 bar
	Pilot operated pressure relief valve (*)	3143	1		Setting: 200 bar
		4383			Setting: 300 bar
1	Relief valve plugged	430109001	1	-	
	Main Anticavitation check valve	915050901	1		
	External piloted valve	915040901	1		
	Plug with pressure-gauge connection	430109003	1		
		421208010		W001A	
	3 positions double-acting spool	421208022	1	W001B	
		421208001		W001A	for hydraulic actuation
		421208005		W002A	
2	3 positions double-acting A and B to tank spool	421208002	1	W002B	
		421208023		W002A	for hydraulic actuation
	3 positions single-acting on A	421208015	1	W005A	
	3 positions single-acting on B	421208017	1	W006A	
	4 positions double-acting with float in the 4 th pos.	421208012	1	W012A	
		421208011			for hydraulic actuation
		320308002			
3*	Control without lever	320308005	1	H004	only for W012 spool
	Protected vertical safety lever	320308001	1	H101 = H102	
		320308003			only for W012 spool
		320508001	2		for BSP version
3	Hydraulic actuation with side ports	320508005	1	H005	only for W012 spool - for BSP version
		320508023	2		for UNF version
		320508024	1		only for W012 spool - for UNF version

Ref.	Description	Order code	Q.ty	Code	Note
4*	3 position spring centred spool	320708001	1	F001A	
	Detent in A and B	320808001	1	F002A	
	Detent in A	320808002	1	F003A	
	Detent in B	320808003	1	F004A	
	Detent in 4 th position	320808004	1	F005A	only for W012 spool
	Prearrangement dual command	320708005	1	F013A	
	Pneumatic control ON-OFF	321108003	1	F020A=F021A	BSP ports
	Proportional Pneumatic control	321208002	1	F022A=F023A	BSP ports
		321208004	1	F126A=F127A	NPT ports
	Electrohydraulic ON-OFF (12 vdc)	321408021	1	F1600	
	Electrohydraulic ON-OFF (24 vdc)	321408022	1	F1610	
	Electrohydraulic Proportional (12 vdc)	322008001	1	F2600	
	Electrohydraulic Proportional (24 vdc)	322008002	1	F2610	
	Electrohydraulic ON-OFF (12 vdc) with reducing valve	321408023	1	F1500=F1520	BSP ports
	Electrohydraulic ON-OFF (24 vdc) with reducing valve	321408024	1	F1510=F1530	BSP ports
	Electrohydraulic Proportional (12 vdc) with reducing valve	322008003	1	F2500=F2520	BSP ports
	Electrohydraulic Proportional (24 vdc) with reducing valve	322008004	1	F2510=F2530	BSP ports
	Electrohydraulic ON-OFF (12 vdc) with reducing valve	321408025	1	F1500=F1520	UNF ports
Electrohydraulic ON-OFF (24 vdc) with reducing valve	321408025	1	F1510=F1530	UNF ports	
Electrohydraulic Proportional (12 vdc) with reducing valve	322008005	1	F2500=F2520	UNF ports	
Electrohydraulic Proportional (24 vdc) with reducing valve	322008006	1	F2510=F2530	UNF ports	
5 Check valve on the work section	320208001	1	-	only for RP and RT section	
Antishock valve on port A	3027			Setting: 100 bar	
	2647		01 PA	Setting: 200 bar	
	2781			Setting: 300 bar	
6 Anticavitation valve on port A	915080801	1	02 PA		
	15888			Setting: 100 bar	
	5091		04 PA	Setting: 200 bar	
	8943			Setting: 300 bar	
Prearrangement for auxiliary valve on port A	430409001		05 PP		
Antishock valve on port B	3027			Setting: 100 bar	
	2647		01 PB	Setting: 200 bar	
	2781			Setting: 300 bar	
7 Anticavitation valve on port B	915080801	1	02 PB		
	15888			Setting: 100 bar	
	5091		04 PB	Setting: 200 bar	
	8943			Setting: 300 bar	
Prearrangement for auxiliary valve on port B	430409001		05 PB		
8 Plug kit (G 1)	430000021		G06		
	430000022	1	G07		
	300008002		U06		
	300009002		U07		

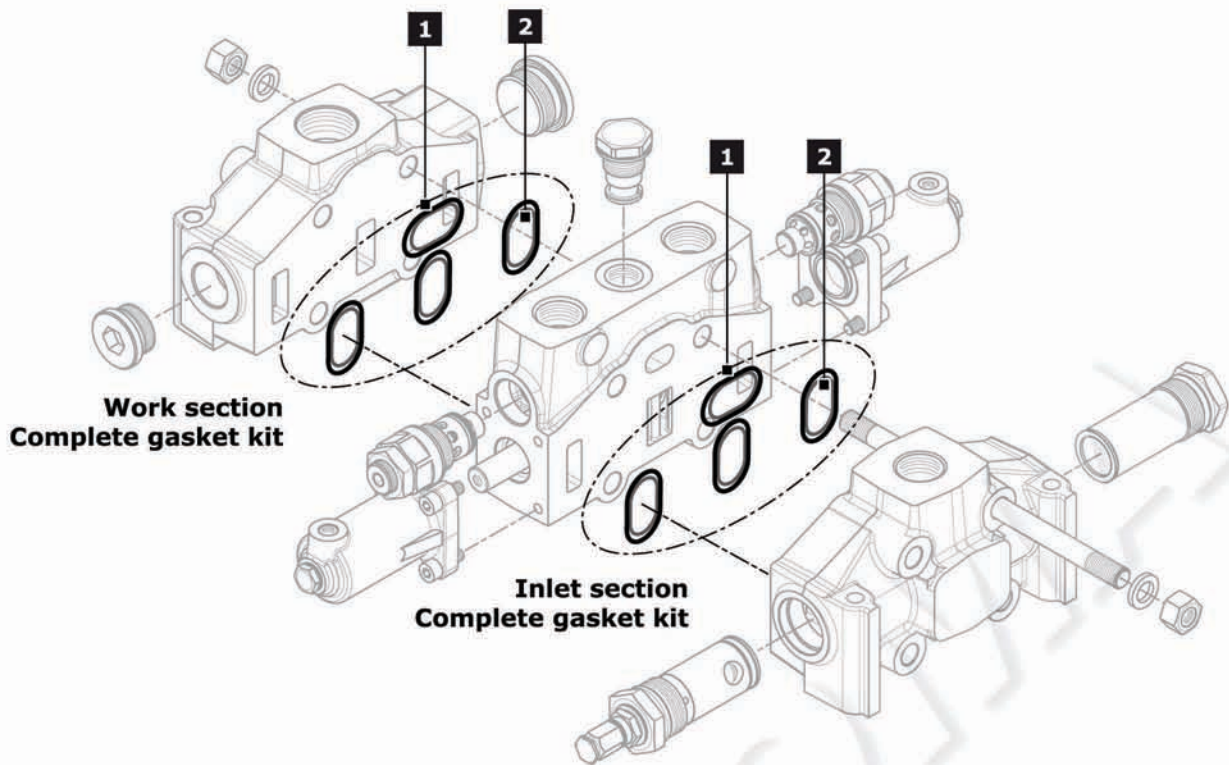

Inlet and work section

Rif.	Order code	Description	Q.ty
1	423401017	Ring	4
2	412020603	O.R. 90SH (2-129)	4

Complete Gasket kit: order code - 350909001

INSTALLATION

Guidelines


- Mount the control valve securely to a flat surface (recommended 3 point fixing); at the time do not use a hammer to positioning by hitting.
- When handling the control valve, be careful not hold the pilot cover or return spring cap of the spool or accessory valves such as main relief valves and anti-shock relief valves.
- Clean piping materials sufficiently before use.
- Make sure to prevent the port openings from being entered with dust or foreign matters.
- Tighten the port connectors surely with the recommended fastening torques.
- Do not direct the jet of a pressure washing unit directly to the valve.

Fittings tightening torque (Nm)

thread type	port P	Port A - B	Port T
BSP (ISO - 228)	G 1	G 1	G 1
with rubber sealing (DIN 3869)	120	120	120
with copper or steel and rubber washer	120	120	120
BSP (ISO - 228)	G 1 1/4	G 1 1/4	G 1 1/4
with rubber sealing (DIN 3869)	120	120	120
with copper or steel and rubber washer	120	120	120
UN-UNF (ISO - 725)	1 1/16 12 UNF	1 1/16 12 UNF	1 1/16 12 UNF
with O.R.	120	120	120
UN-UNF (ISO - 725)	1 5/16 12 UNF	1 5/16 12 UNF	1 5/16 12 UNF
with O.R.	120	120	120

General clamping torque

The following table provides the main tightening torques of the distributor D20:

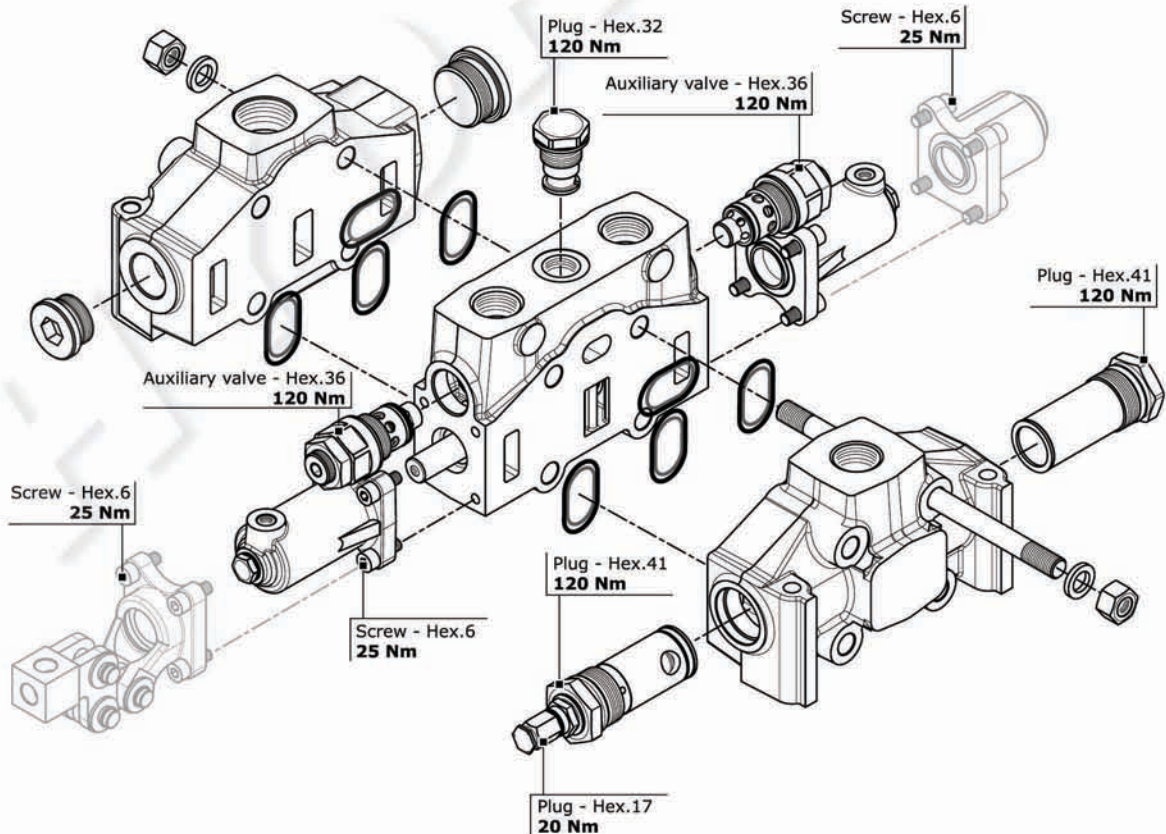

Dimensions - Thread codes


The connection ports size is indicated by an ordering code common for all Hydrocontrol products. Following table shows all available connections.

METRIC THREAD (ISO 9974-1)			
Type	M18x1,5	M22x1,5	M27x2
Code	M01	M02	M03

BSP THREAD (ISO 1179-1)								
Type	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Code	G02	G03	G04	G05	G06	G07	G08	G09

UN / UNF THREAD (ISO 11926-1)						
Type	9/16" 18 UNF SAE6	3/4" 16 UNF SAE8	7/8" 14 UNF SAE10	1 1/16" 12 UNF SAE12	1 5/16" 12 UNF SAE16	1 5/8" 12 UNF SAE20
Code	U02	U03	U04	U05	U06	U07

Dimensions - SAE Flange codes

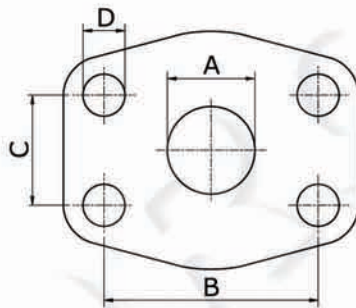

SAE / 3000 FLANGE (ISO 6162-1)												
Type	3/4" (MA)	3/4" (UNC)	1" (MA)	1" (UNC)	1 1/4" (MA)	1 1/4" (UNC)	1 1/2" (MA)	1 1/2" (UNC)	2" (MA)	2" (UNC)	3" (MA)	3" (UNC)
Code	S03	S04	S05	S06	S07	S08	S09	S10	S11	S12	S15	S16
A	19	19	25	25	32	32	38	38	51	51	76	76
B	47,6	47,6	52,4	52,4	58,7	58,7	69,9	69,9	77,8	77,8	106,4	106,4
C	22,3	22,3	26,2	26,2	30,2	30,2	35,7	35,7	42,9	42,9	61,9	61,9
D	M10	3/8-16	M10	3/8-16	M10	7/16-14	M12	1/2-13	M12	1/2-13	M16	5/8-11

SAE / 6000 FLANGE (ISO 6162-2)								
Type	3/4" (MA)	3/4" (UNC)	1" (MA)	1" (UNC)	1 1/4" (MA)	1 1/4" (UNC)	1 1/2" (MA)	1 1/2" (UNC)
Code	S33	S34	S35	S36	S37	S38	S39	S40
A	19	19	25	25	32	32	38	38
B	50,8	50,8	57,2	57,2	66,6	66,6	79,3	79,3
C	23,8	23,8	27,8	27,8	31,8	31,8	36,5	36,5
D	M10	3/8-16	M12	7/16-14	M14	1/2-13	M16	5/8-11