Part number:

HYDROMA
HYDRAULICKÉ SYSTÉMY

HIDROMA SISTEMS
UKŁADY HYDRAULICZNE

HYDROMA
ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

DEPUROIL

FEATURES

- *IDEAL FOR DIALYSIS OF OIL*
- *COMPACTNESS*
- *SILENT*
- *CLOGGING INDICATOR*
- *5 METERS OF CABLE*
- *SPIRAL TUBES*

The PIUSI DEPUROIL is an immediate mobile filtering unit, the easiest solution to a single step filtration suitable for any kind of tank. It includes the PIUSI VISCOMAT VANE pump, suitable for low/medium viscosity lubricants.



DEPUROIL

PERFORMANCE


AC
VOLTAGE
POWER



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
00050300A	28	61,7	600X290X300	23,6X11,4X11,8		1
F00503100	28	61,7	600X290X300	23,6X11,4X11,8		1

CHART

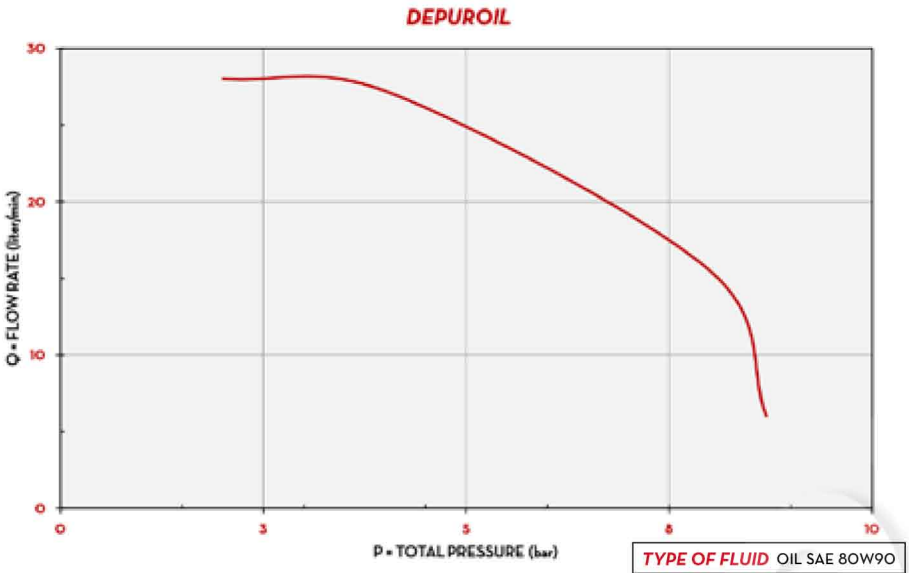

TYPE OF FLUID	OIL SAE 80W90
TEMPERATURE	17 °C

IN THE BOX


- DEPUROIL
- FILTER CARTRIDGE
- SUCTION HOSE
- DELIVERY HOSE
- INSTRUCTION MANUAL

DETAILS


LARGE DIAMETER WHEELS


STURDY STRUCTURE

DIMENSIONS

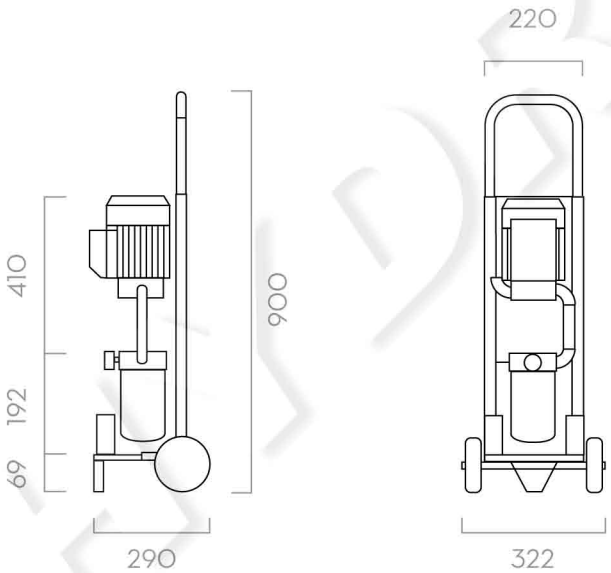

Dimensions expressed in millimeters

MATERIALS

- BODY: CAST IRON
- ROTOR: SINTHERED STEEL
- VAINS: TECHNOPOLYMER
- SHAFT: STEEL
- FILTER: ABSORBENT FILTERING PAPER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			PUMP	HOSE LENGHT		FILTERING CAPACITY
			L/MIN	GPM	AC V./HZ DC VOLT	POWER WATT	AMP. MAX.	TYPE	DELIVERY /FT	SUCTION M/FT	MU
00050300A	DEPUROIL M 230V/50HZ	O	20-25	5,28-6,6	230/50	1350	6,2	VISCOMAT 70	2 / 6,5	2 / 6,5	10
F00503100	DEPUROIL 60	O	50	13	230/50	1350	6,2	VISCOMAT 90	2	2	10