



TF4



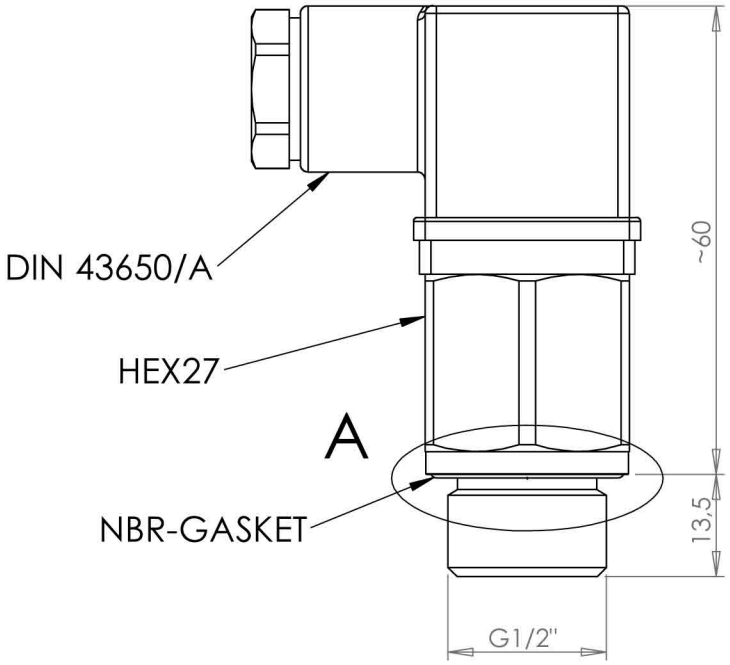

DETAIL **A**
SCALE 2 : 1

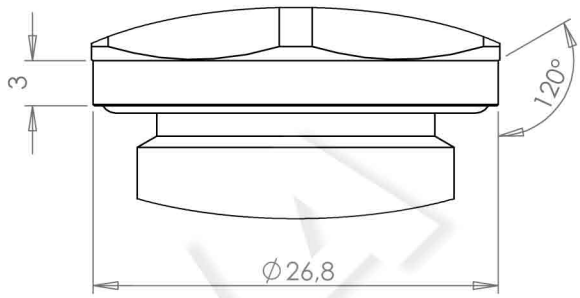



Electrical load (resitive)	12Vdc/10A 24Vdc/5A	Hysteresys	~12°C
	125Vac/15A 220Vac/10A	Housing	BRASS CW614N
		Contact holder	PA 66
Electrical protection	IP65	Electrical contact	Silver alloy
Electrical configuration	NO	Fluid temperature	-30 ÷ 140°C
Switching temperature	60°C +/-3.5	Connector	DIN43650/A 360° ORIENTABLE

REV.	TECHNICAL CHANGE	DATE	DRAWN
0	FIRST ISSUE	30/11/21	MV
1	SEE DETAIL A	05/05/2023	MV

MATERIAL

FINISHING

DESCRIPTION

TEMPERATURE SWITCH

A4	WHERE NOT SPECIFIED: DIMENTION IN **mm**	SCALE 1:1	WEIGHT	PART NUMBER **TF4B09060AS.11**	REVISION **1**