

# DIRECTIONAL CONTROL VALVES
# PNEUMATIC OPERATED POPPET 2-WAY
# NORMALLY OPEN SPECIAL CAVITY

| VPI-8A-2A-09-NA-S | 017-E | OD.65.06.17.14.00 |
|---|---|---|

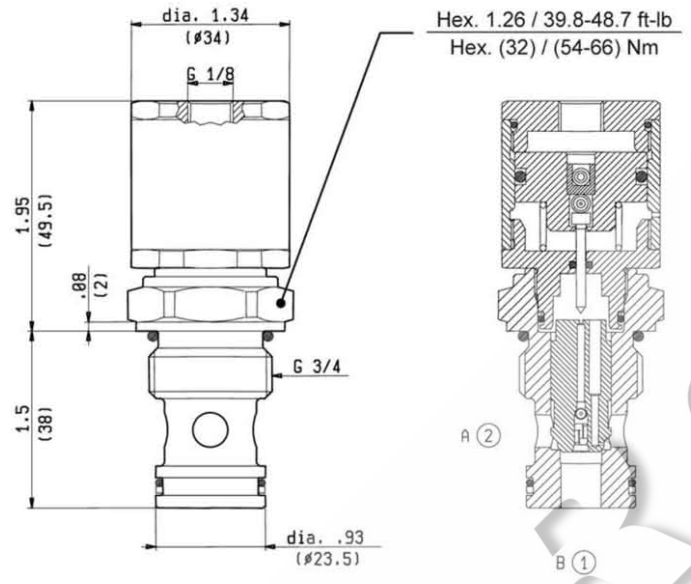



## TECHNICAL DATA

| | |
|---|---|
| Maximum Operating Pressure | 5000 psi (350 bar) |
| Rated Flow | 19 gpm (70 l/min) |
| Cavity - Tooling (017-E) | page CT.S.006.U |
| Line bodies | page MN2.S... |
| Weight | 0.750 lbs (0.340 kg) |
| Fluids - Temperatures | page 7.01.040 |
| Testing Conditions - Seals | page 7.01.040 |
| Internal Leakage | page 7.01.040 |
| Filtration : 25 µm nominal or better | page 7.01.050 |
| Mounting Position | unrestricted |

**IMPORTANT**: When valve is not operated, flow from 1 to 2 is not recommended due to high opening pressure.

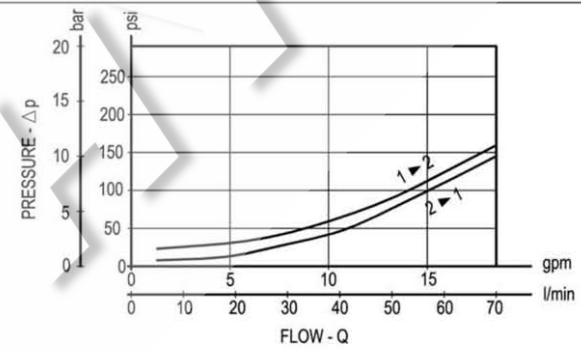


## PILOT PRESSURE

| | MIN. | psi (bar) | MAX. |
|---|---|---|---|
| | 58 (4) | | 218 (15) |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |